



PRODUCT OVERVIEW

2021

Monitoring

Access

IP Serial

www.HW-group.com



*HW group s. r. o. is a Czech manufacturer of IoT monitoring and remote control solutions.
Our top quality products create a full ecosystem, from sensors to monitoring software.
All our units are manufactured in the European Union and sold in over 40 countries.*

What do we make?

- IoT devices and sensors
- Monitoring and control solutions
- Online portal for IoT sensors
- Monitoring software and SDK
- Access control systems
- IP serial products

What makes us different?

- Rich and modular product ecosystem
- Compatible with many SW solutions and protocols
- Free SDK and Push protocol for 3rd party integration
- 18 years of experience with monitoring devices
- Strict quality control and compliance
- Made in the EU

Typical applications

- Temperature and humidity monitoring
- Water leaks and fire alarms
- Voltage, current, DI and DO monitoring
- Energy consumption metering
- Building management
- Access control and security

References

*We have helped the following companies with their monitoring or access solutions.
We would be thrilled if you were the next.*





Monitoring

pages: 4–47



Sensor



Detector



Accessories



Temperature



Relative Humidity



Dew point



Water Leak Detection



Voltage



Smoke



Atmospheric pressure



Gas



Light



Current



Contact



Motion



Airflow



Supply



Energy



1-Wire sensors



1-Wire UNI sensors



Digital input



RS-485 industrial sensors



M-Bus sensors



Water leak detection



Open collector output



Relay output



Virtual output



Relay output 1W-UNI



Power over Ethernet



Power over Ethernet on request



Data logging



SMS notification



SNMP trap



E-mail notification



HW group SMS gateway



Web server



SensDesk compatible



Ethernet



Wi-Fi



GSM / GPRS



Lte



Narrowband



Battery / Accumulator

Access

pages: 48–51



E-mail notification



HW group SMS gateway



Web server



Data logging



SNMP trap



Ethernet



Power over Ethernet on request

IP serial

pages: 52–53



Serial port RS-232/485



Web server



Digital input



Relay output



Data logging



Power over Ethernet on request



Monitoring

Our portfolio of monitoring and control units with LAN/WiFi/GSM/LTE connectivity offers a complete solution for monitoring your site – from measuring various quantities and watching the status to monitoring energy consumption. In addition to logging and analysis of measured values, immediate actions can be taken – an alarm immediately alerts you to a value out of a specified range.

Our units support a wide range of protocols to facilitate the integration with your existing system and 3rd party software. We offer dozens of types of sensors, detectors and accessories, particularly suitable for the areas mentioned below. We also offer our software, custom-designed to meet our clients' needs. Simply select (or ask for help with selecting) suitable device, sensors and software, easily install and configure them, and let our products do the rest.

Typical industry segments include: IT, electronics, industrial, telco, pharmaceuticals, food, shipping, transport, hotels/accommodation facilities. Our solutions are often deployed in data centers, BTS sites, factories, warehouses or pharmacies.





Poseidon2 4002



Secure solution for remote environment monitoring and control of outputs.

Poseidon2 4002 supports up to 16 sensors connected over 1-Wire/1-Wire UNI, up to 26 sensors connected over RS-485 and up to 12 detectors connected to digital inputs. Poseidon2 4002 can control 4 digital NO/NC relay outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M).



This unit can be used as a stand-alone device with e-mail alerts, or as a part of a complex monitoring system with SMS alerts sent via a central HWg-SMS-GW3 / SMS-GW3 LTE gateway.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger

Poseidon2 3468



Remote monitoring and control for industrial applications with 230 V/16 A relay outputs.

Poseidon2 3468 supports up to 8 sensors connected over 1-Wire/1-Wire UNI and up to 4 detectors connected to digital inputs. Poseidon2 3468 can control 2 digital 230 V/16 A relay outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M). In addition to the standard 9–30 V power input, this unit can



be powered from -48 V to enable easy use in Telco solutions. The device can be monitored remotely over the internet using the SensDesk portal.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger



Poseidon2 3268



Remote monitoring of sensors and detectors and control of relay outputs.

Poseidon2 3268 supports up to 8 sensors connected over 1-Wire/1-Wire UNI and up to 4 detectors connected to digital inputs. Poseidon2 3268 can control 2 digital NO/NC relay outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M).

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger


Poseidon2 3266



Cost-effective model for remote monitoring of sensors and detectors.

Poseidon2 3266 supports up to 8 sensors connected over 1-Wire/1-Wire UNI and up to 4 detectors connected to digital inputs. With support for over 50 SNMP and SCADA applications, Poseidon2 devices can be integrated in a wide range of monitoring and control systems. MQTT protocol enables integration in IoT solutions.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger

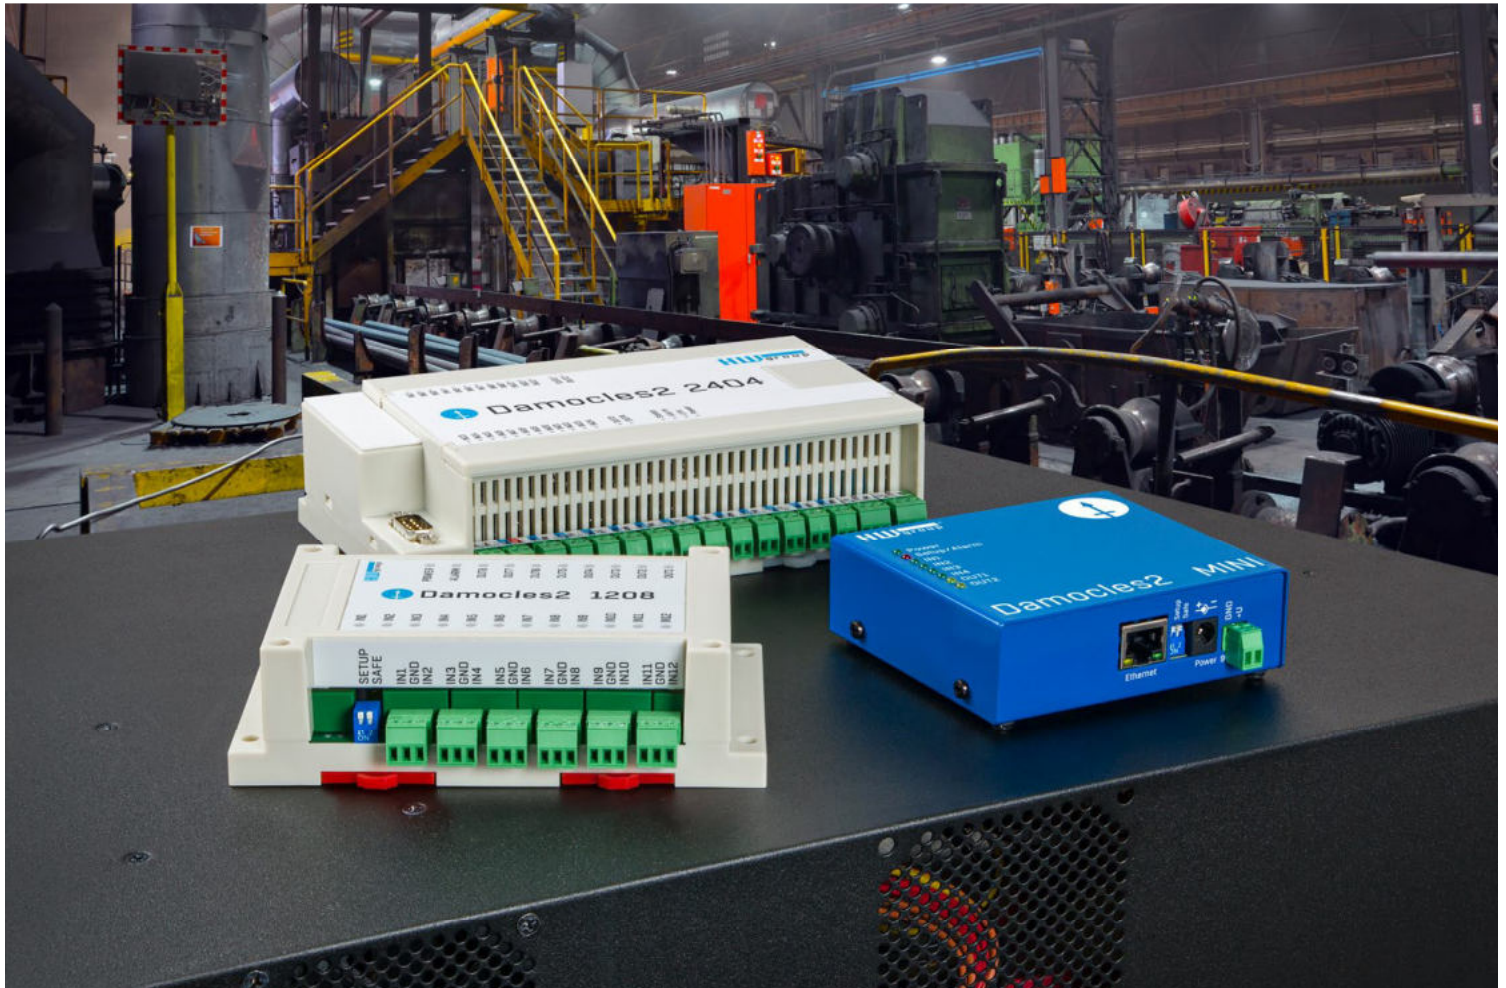

Damocles2 2404



Secure industrial I/O device with PoE and Telco -48 V power options.

Damocles2 2404 supports up to 24 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), all digital inputs feature S0 pulse counters with memory. Damocles2 2404 can control 4 digital NO/NC relay outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M).

Thanks to 9–30 V DC, -48 V and PoE power options, Damocles2 2404 can be deployed in a wide range of situations.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger



Damocles2 1208



Industrial I/O with enhanced IP security and DC outputs.

Damocles2 1208 supports up to 12 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), all digital inputs feature S0 pulse counters with memory. Damocles2 1208 can control 8 open collector digital outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M). Damocles2 1208 is an Ethernet I/O device with enhanced IP

security and an excellent cost per I/O pin. The device can be monitored remotely over the internet using the SensDesk portal.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger

Damocles2 MINI



Smart I/O controlled over Ethernet.

Damocles2 MINI supports up to 4 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), all digital inputs feature S0 pulse counters with memory. Damocles2 MINI can control 2 digital NO/NC relay outputs, as well as up to 8 virtual digital outputs (VDO) at remote Poseidon2 or Damocles2 units (M2M). Damocles2 MINI is a compact and cost-effective Ethernet I/O

device with enhanced IP security. The device can be monitored remotely over the internet using the SensDesk portal.

Protocols	HTTP, HTTPS, IPv6, MQTT (IoT), SMTP, SNMPv1, SNMPv3, SNMP traps, Modbus/TCP, XML, NetGSM, HWg-PUSH
Software	SensDesk, HWg-PDMS, HWg-Trigger



STE2 r2



WiFi and Ethernet temperature and humidity sensor with digital inputs.

STE2 r2 supports up to 5 sensors connected over 1-Wire / 1-Wire UNI and up to 2 detectors connected to digital inputs. Whenever a value is out of the specified range or a contact changes state, an e-mail notification is sent. Besides a standard 5 V adapter, STE2 r2 can be powered over the Ethernet (PoE).

This is an ideal solution for temperature and humidity monitoring in sensitive environments, with the possibility to connect a wide range of supplemental detectors, such as door contacts, motion detectors, water leak detectors, smoke detectors, CO₂ and voltage sensors.

Protocols	HTTP, HTTPS, SNMPv1, HWg-PUSH, XML, NetGSM
Software	SensDesk, HWg-PDMS, HWg-Trigger

www.HW-group.com



Monitoring – devices

HWg-Ares12



Industrial measuring and monitoring device for 14 sensors with GSM communication and back-up power.

HWg-Ares12 supports up to 14 sensors connected over 1-Wire/ 1-Wire UNI and up to 2 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), physical digital inputs feature S0 pulse counters with memory. HWg-Ares12 can be extended with a relay output expansion module connected over the 1-Wire UNI bus to allow

14

1-Wire sensors

14

1-Wire UNI sensors

2

DIGITAL input

1

RS-485 INDUSTRIAL sensors

1

M-Bus sensors

1

WLD

1

OPEN COLLECTOR output

1

RELAY output

1

VIRTUAL output

1

External RELAY output

1

PoE

1

Buffer data logger

5

SMS alert

1

SNMP trap

5

E-mail alert

1

SMS gateway

1

Web server

1

SensDesk

1

LAN

1

Wi-Fi

1

GSM/GPRS

1

Lte

1

NB-IoT

1

ACCU

remote control of other appliances, or to implement a “thermostat” function. HWg-Ares12 is an industrial device with back-up power for remote monitoring and alerting over GSM from locations without LAN access.

Protocols	HWg-PUSH, NetGSM, SMTP
Software	SensDesk, HWg-PDMS

Ares 12 LTE



Industrial measuring and monitoring for 14 sensors with GSM and LTE communication and back-up power.

Ares 12 LTE supports up to 14 sensors connected over 1-Wire/ 1-Wire UNI and up to 2 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), physical-digital inputs feature S0 pulse counters with memory. Ares 12 LTE can be extended with a relay output expansion module connected over the 1-Wire UNI bus to

14

1-Wire sensors

14

1-Wire UNI sensors

2

DIGITAL input

1

RS-485 INDUSTRIAL sensors

1

M-Bus sensors

1

WLD

1

OPEN COLLECTOR output

1

RELAY output

1

VIRTUAL output

1

External RELAY output

1

PoE

1

Buffer data logger

5

SMS alert

1

SNMP trap

5

E-mail alert

1

SMS gateway

1

Web server

1

SensDesk

1

LAN

1

Wi-Fi

1

GSM/GPRS

1

Lte

1

NB-IoT

1

ACCU

allow remote control of other appliances, or to implement a “thermostat” function. Ares 12 LTE is an industrial device with back-up power for remote monitoring and alerting over GSM from locations without LAN access.

Protocols	HWg-PUSH, NetGSM, SMTP
Software	SensDesk, HWg-PDMS



HWg-Ares10



Cost-effective GSM thermometer with remote management and alerts sent by e-mail, text messages or by dialing a number.

HWg-Ares10 supports up to 6 sensors connected over 1-Wire/ 1-Wire UNI and up to 2 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), the digital inputs feature S0 pulse counters with memory. HWg-Ares10 is a cost-effective GSM thermometer for



remote monitoring and alerting over GSM for locations without LAN access. During power outages or high/low temperatures this device calls your cell phone and/or immediately sends an email/SMS.

Protocols	HWg-PUSH, NetGSM, SMTP
Software	SensDesk, HWg-PDMS

Ares 10 LTE



Economical GSM and LTE thermometer with remote management and alarm via ringing, SMS and e-mail.

Ares 10 LTE supports up to 6 sensors connected over 1-Wire/ 1-Wire UNI and up to 2 detectors connected to digital inputs. In order to connect meters (such as water, gas or electricity meters), the digital inputs feature S0 pulse counters with memory. Ares 10 LTE is a cost-effective GSM thermometer for remote monitoring and alerting over GSM for locations without



LAN access. During power outages or high/low temperatures this device calls your cell phone and/or immediately sends an email/SMS.

Protocols	HWg-PUSH, NetGSM, SMTP
Software	SensDesk, HWg-PDMS



Water Leak Detection system

WLD2




4 zones water leak detector with Ethernet connectivity and WIFI.

WLD2 is a WiFi/Ethernet flood detector with WWW, SNMP and PoE support, designed for flood detection using flood detection cables. The sensing cable detects as little as a few drops of liquid and can be also used to detect condensation. Whenever a liquid is detected, the device sends an e-mail or an SNMP Trap, or uses a central SMS gateway (HWg-SMS-



GW3/SMS-GW3 LTE) to send a text message. By providing early detection and warning, WLD2 can prevent water damage and avoid the associated costs.

Protocols	HTTP, HTTPS, SNMPv1, SNMP traps, XML, NetGSM
Software	SensDesk, HWg-PDMS, HWg-Trigger

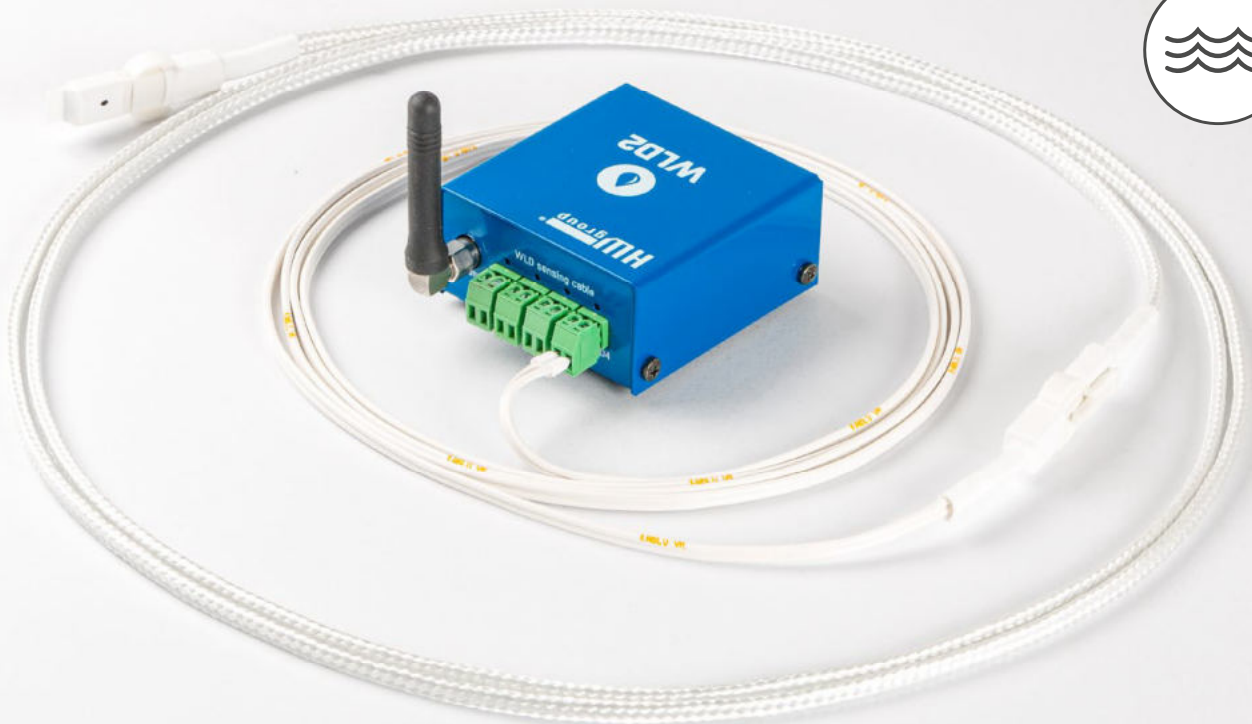

Why is the WLD water cable such a robust solution?

- If you use WLD2 in an environment where there is a WIFI signal, you only need a power supply and 2m of cable length, there is no need to supply the LAN network with a TP cable
- WLD cable can be used on metal floors
- WLD2 is galvanically isolated from the power supply, so there are no false alarms, even when using a very long detection and extension cable
- We offer several types of lengths, such as 2, 10 and 50 m
- The detection cables can be extended based on your needs
- Interruption and disconnection of the detection cable will be indicated within seconds
- The detection cable is needed only where there is a real risk of flooding, you can use a cheaper prolong cable elsewhere
- **WLD2 supports 4 independent detection zones, you can get notifications of the first drops of water from each zone**
- The detection cable can be bent and twisted without causing false alarms

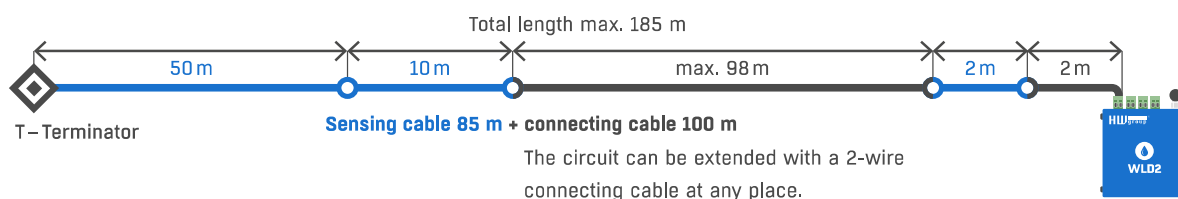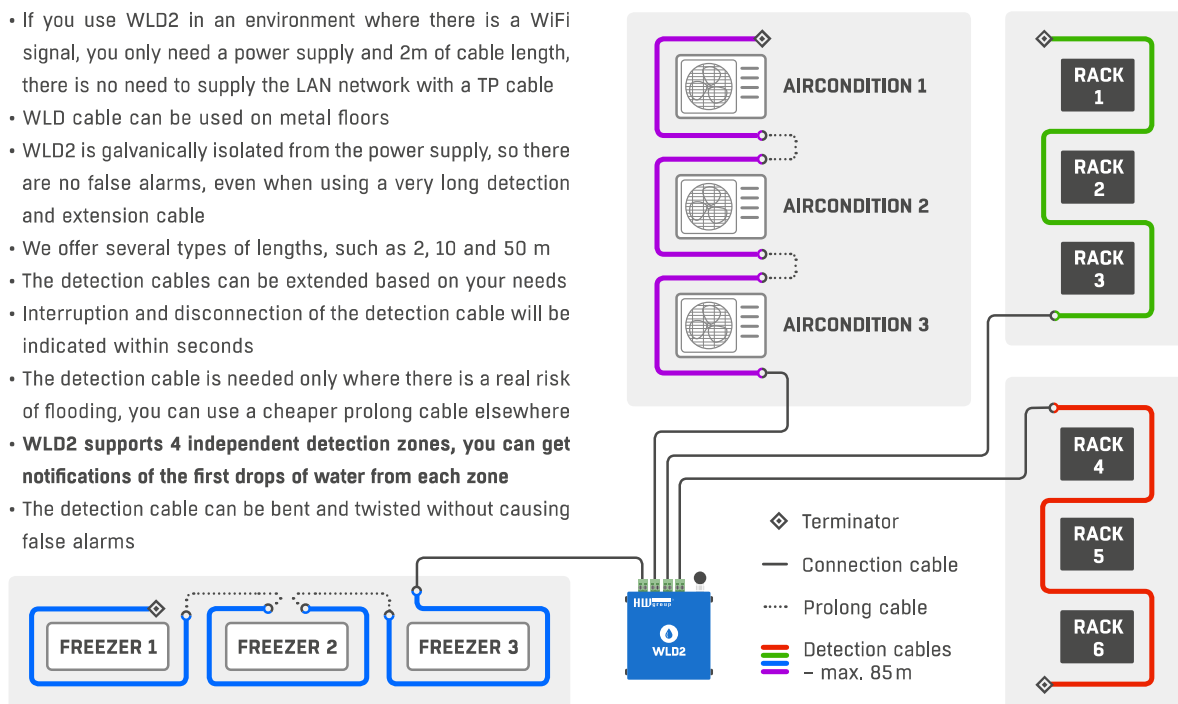

Sensor WLD Relay 1W-UNI



Water leak detector that detects water in a 2D area using a sensing cable and signals by switching a relay.

Sensor WLD Relay 1W-UNI can work as a stand-alone device, or as a sensor connected to Poseidon2 or HWg-Ares. The sensing cable detects as little as a few drops of a liquid, and can be also used to detect condensation. Whenever a liquid is detected, the device switches the relay, or uses a Poseidon2 or HWg-Ares to send an e-mail or a SNMP Trap. By providing

an early detection and warning, Sensor WLD Relay 1W-UNI can prevent damages and avoid the associated costs even at places without Ethernet connectivity.

Protocols	-
Software	-

HW group offers several products that provide ideal solutions for flood and water leak detection. See the table below and discover the best solution for your situation:



	HWg-WLD	WLD2	SD-WLD	WLD-Relay
Detection zones	1	4	1	1
Max. length of WLD sensing cable	85 m	85 m	85 m	85 m
Max. length of WLD extension cable	100 m	100 m	100 m	100 m
LAN (RJ45)	✓	✓	✓	✗
WiFi	✗	✓	✓	✗
Connection to the SensDesk Portal	✗	✓	✓	✗
Alert for broken LAN / WiFi connection	✗	SensDesk/HWg-Trigger	SensDesk	✗
1Wire-UNI output (RJ11)	✗	✗	✗	✓
Relay output	✗	✗	✗	✓
Flood / torn cable indication	✓	✓	✓	Poseidon2
It works with remote relay	✗	Poseidon2/Damocles2	SensDesk	✗



HWg-SMS-GW3



GSM gateway for sending text messages (SMS) over the Ethernet.

HWg-SMS-GW3 is a central text message (SMS) gateway that HWg devices and applications in the same network can use to dial numbers or send SMS alerts. Target phone numbers are specified in the sending device or the HWg-Trigger application. The central HWg-SMS-GW3 text message gateway significantly saves costs of external GSM modems, and the entire



installation only needs one SIM card. It sends messages from any connected device, even without an internet connection.

Protocols	SNMPv1, SNMPv3, XML, NetGSM
Software	HWg-Trigger

SMS-GW3 LTE



SMS-GW3 LTE is a LAN gateway for sending alarm SMS from HW group devices.

SMS-GW3 LTE is a central text message (SMS) gateway that HWg devices and applications in the same network can use to dial numbers or send SMS alerts. Target phone numbers are specified in the sending device or the HWg-Trigger application. The central SMS-LTE text message gateway significantly saves costs of external GSM modems, and the entire installation only



needs one SIM card. It sends messages from any connected device, even without an internet connection.

Protocols	SNMPv1, SNMPv3, XML, NetGSM
Software	HWg-Trigger



2021-03-16 21:10:59



IP WatchDog2 Industrial



Industrial watchdog that checks devices for heartbeat over the Ethernet and RS-232.

IP WatchDog2 Industrial monitors the correct functioning of devices over LAN (PING / WEB) or serial line (RS-232). When an outage is detected, it reacts by power-cycling or restarting the device using its two output relays. Everything takes place automatically without human intervention. Up to 10 devices can be monitored. An e-mail or SNMP Trap can be also sent in



response to an outage. With a SMS gateway, it can even send text message alerts.

Protocols	HTTP, SNMPv1, SNMP trap, HWg-PUSH, XML, NetGSM
Software	SensDesk, HWg-PDMS, HWg-Trigger

IP WatchDog2 Lite



A watchdog that checks devices for heartbeat over the Ethernet.

IP WatchDog2 Lite monitors the correct functioning of devices over LAN (PING / WEB). When an outage is detected, it reacts by power-cycling or restarting the device using its two output relays. Everything takes place automatically without human intervention. Up to 10 devices can be monitored. An e-mail or SNMP Trap can be also sent in response to an outage. With



a SMS gateway, it can even send text message alerts thanks to when there is a problem, you will always be alerted on time.

Protocols	HTTP, SNMPv1, SNMP trap, HWg-PUSH, XML, NetGSM
Software	SensDesk, HWg-PDMS, HWg-Trigger



HWg-PWR 3/12/25



1-Wire sensors

1-Wire UN sensors

DIGITAL input

RS-485 INDUSTRIAL sensors

3/12/25 M-Bus sensors

WLD

OPEN COLLECTOR output

RELAY output

VIRTUAL output

External RELAY output

PoE

Buffer data logger

SMS alert

1 SNMP trap

3 E-mail alert

1 SMS gateway

Web server

SensDesk

LAN

GSM/GPRS

Lte


NB-IoT

Smart Ethernet device for remote consumption monitoring and collecting data from external M-Bus meters.

HWg-PWR is available in three versions for connecting 3, 12 or 25 external meters with the M-Bus (EN13757) interface. It enables remote monitoring of consumption and other data from a wide range of meters (such as electricity, gas and water meters). Meters from different manufacturers can be combined. When a value is outside of the specified range, HWg-PWR can

send an e-mail alert or a SNMP Trap. With a SMS gateway, it can even send text message alerts.


Protocols	HTTP, SNMPv1, SNMP trap, HWg-PUSH, Modbus/TCP, XML, NetGSM
Software	SensDesk, HWg-PDMS, HWg-Trigger

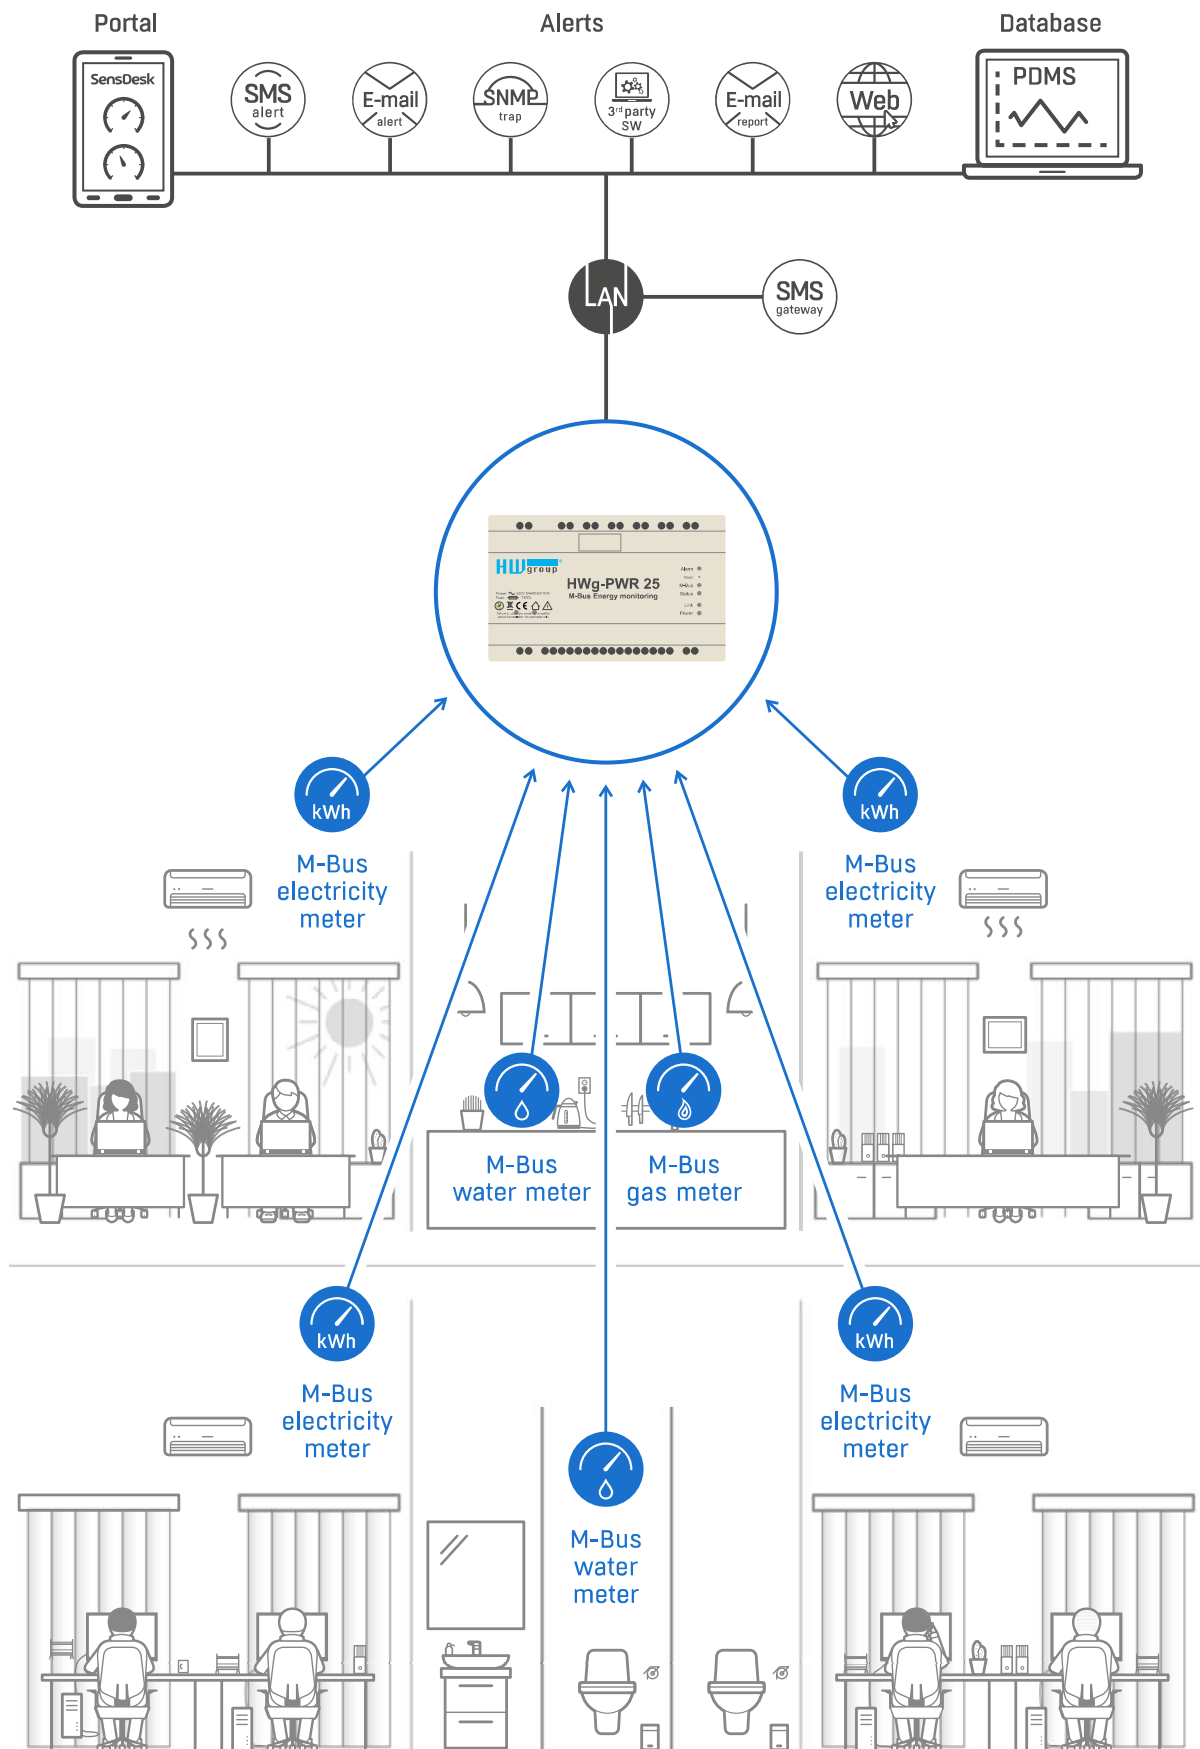



SD devices

The SD family are 4 simple devices for the monitoring of temperature, humidity, voltage, current and other parameters. They also detect water leaks, smoke, movement or open doors. The devices connect via Ethernet or WiFi to the SensDesk.com portal. SD devices are a full, scalable and universal monitoring solution. We offer an ecosystem of 100s of precise sensors and detectors.

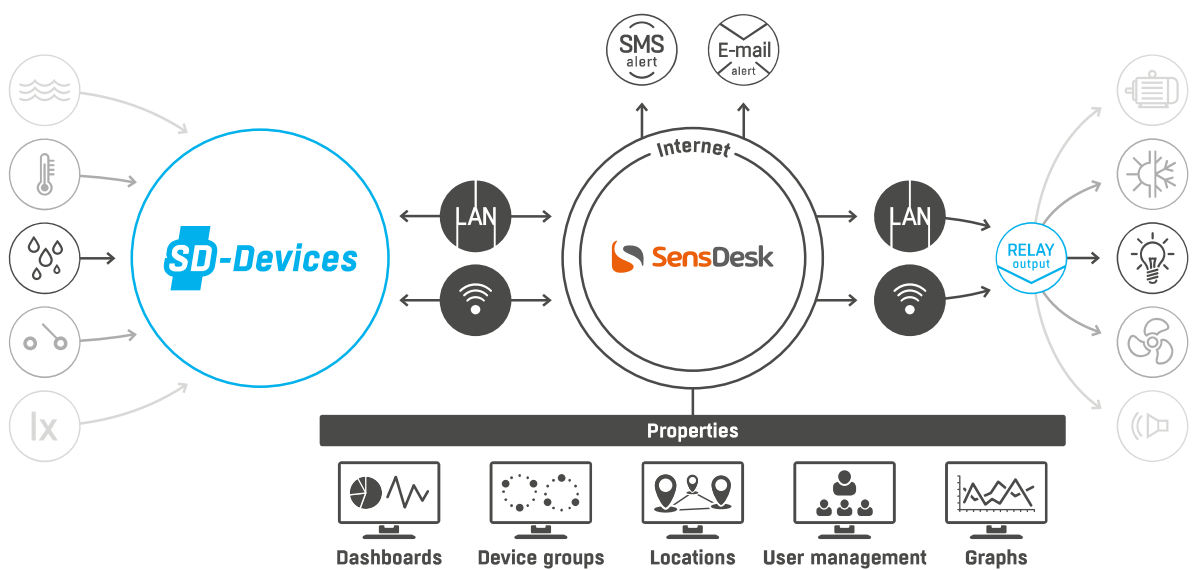



SD-2x1Wire



Simple device for monitoring temperature, humidity. Includes Ethernet and WiFi connectivity.

SD-2x1Wire is a device for connecting thermometers, humidity sensors, or other sensors via the 1-Wire bus. The device allows connecting four sensors with the 1-Wire or 1-Wire UNI bus. For configuration, SD-2x1Wire features a built-in web server and WiFi connectivity. The device can be monitored remotely over the Internet using the free SensDesk portal and the



SensDesk Mobile app, it can send an e-mail alert whenever the specified range of values is exceeded. If you also use our SMS-GW3 together with the portal, the alerts can be also sent as text messages (SMS).

Protocols	HTTP, DHCP, SNTP, HWg-Push
Software	SensDesk

SD-WLD



SD-WLD is a water leak detector with Ethernet and WiFi that detects the presence of water using a sensing cable.

SD-WLD is a simple detector that detects water leaks using a moisture-sensing cable. Thanks to early detection and alerting, SD-WLD can prevent substantial damages caused by unexpected adverse environment conditions. For configuration, SD-WLD features a built-in web server and WiFi connectivity. The device can be monitored remotely over



the Internet using the free SensDesk portal and the SensDesk Mobile app.

Protocols	HTTP, DHCP, SNTP, HWg-Push
Software	SensDesk



SD-2xIn



Simple device with WiFi and Ethernet for monitoring open doors and windows.

SD-2xIn is a device for connecting door or window contacts, PIR motion detectors or smoke or gas detectors with a dry contact output. It allows connecting 2 independent sensors. For configuration, SD-2xIn features a built-in web server and WiFi connectivity. The device can be monitored remotely over



the Internet using the free SensDesk portal and the SensDesk Mobile app.

Protocols	HTTP, DHCP, SNTP, HWg-Push
Software	SensDesk

SD-2xOut




Simple device with two digital outputs. Includes Ethernet and WiFi connectivity.

The SD-2xOut device features two digital outputs that can be easily controlled using the SensDesk portal. For configuration, SD-2xOut features a built-in web server and WiFi connectivity. The device can be monitored remotely over the Internet using the free SensDesk portal and the SensDesk Mobile app.




Protocols	HTTP, DHCP, SNTP, HWg-Push
Software	SensDesk

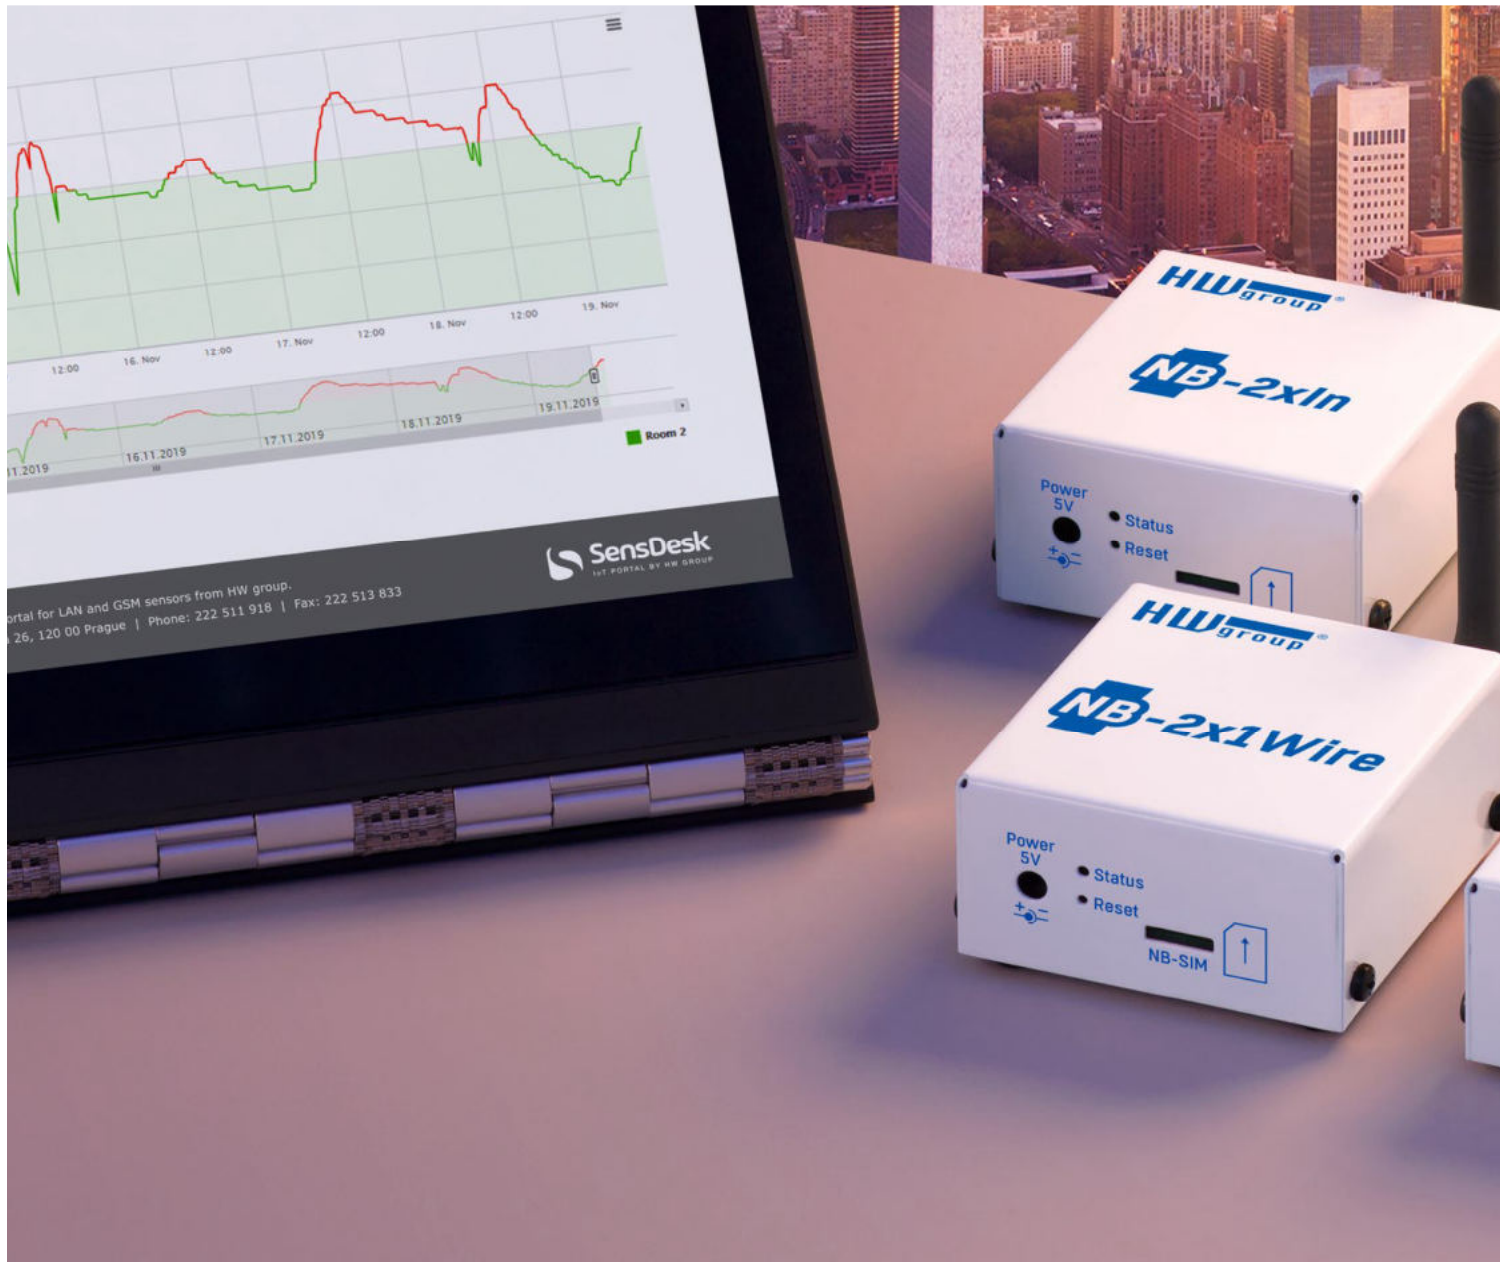

NB devices

The NB family are simple devices for the monitoring of temperature, humidity, water leaks, voltage, current and other values in remote places. The Narrowband IoT devices are battery powered with a battery lifetime of 2 years. The devices connect to the SensDesk.com portal where you can monitor and control your entire system. Your project is set up in just a few clicks and you can get your data in minutes.

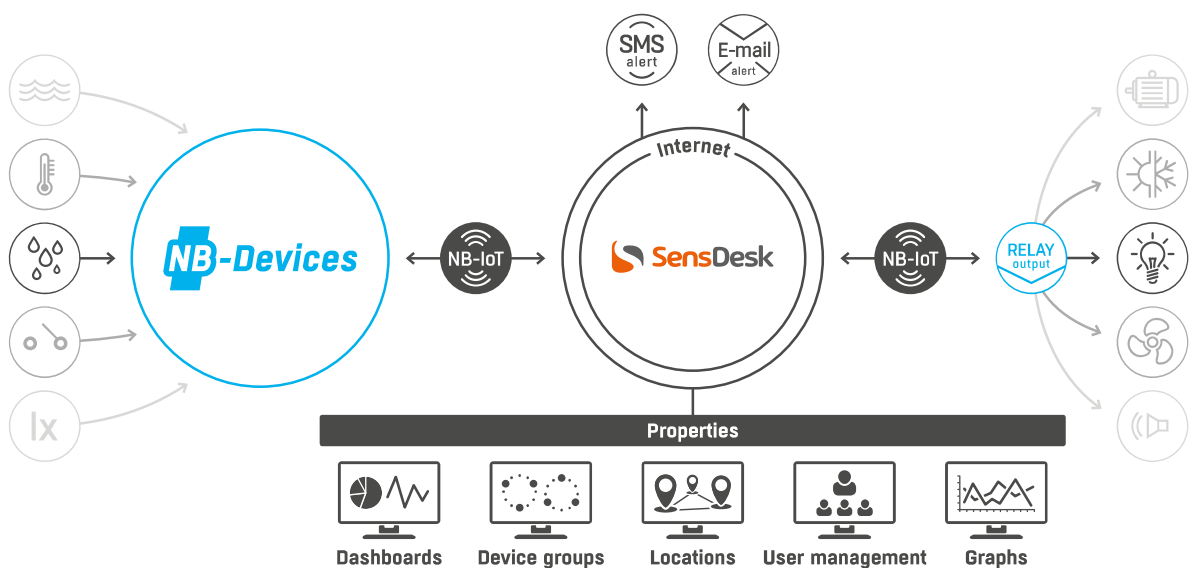

2021-08-16 21:10:59



Monitoring – Narrowband IoT devices

NB-2x1Wire



A simple device for monitoring temperature, humidity and more in remote places. Narrowband IoT connectivity.

NB-2x1Wire is a device for connecting temperature, humidity or other 1-wire sensors. The device allows connecting four sensors with the 1-Wire or 1-Wire UNI bus. It is powered by an internal battery or external power supply. The device can be monitored and configured remotely using the SensDesk portal and the SensDesk Mobile app.

Protocols	COAP, DTLS
Software	SensDesk

NB-WLD



NB-WLD is a water leak detector with Narrowband IoT connectivity. It uses a very sensitive detection cable.

NB-WLD is a simple device that detects water leaks using a moisture-sensing cable. Thanks to early detection and alerting, NB-WLD can prevent substantial damages. It is powered by an internal battery or external power supply. The device can be monitored and configured remotely using the SensDesk portal and the SensDesk Mobile app.

Protocols	COAP, DTLS
Software	SensDesk



NB-2xIn



An easy to use device with Narrowband IoT connectivity for monitoring digital inputs in remote places.

NB-2xIn is a device for connecting door contacts, smoke, gas and motion detectors with a dry contact output. It allows connecting 2 independent sensors. It is powered by an internal battery or external power supply.

The device can be monitored and configured remotely using the SensDesk portal and the SensDesk Mobile app.



Protocols	COAP, DTLS
Software	SensDesk

NB-2xOut



Narrowband IoT device with relay outputs, that can control remote technology manually or based on conditions.

The NB-2xOut device features two relay outputs that can be easily controlled using the SensDesk portal. The device can be controlled manually or based on alarms from other devices. It is powered by an internal battery or external power supply. The device can be monitored and configured remotely using the SensDesk portal and the SensDesk Mobile app.



Protocols	COAP, DTLS
Software	SensDesk



SensDesk

Monitoring portal for your IoT projects

SensDesk.com is a web-based service for online remote monitoring and control of HW group sensors and devices. You can monitor temperature, humidity, water leaks, digital inputs, voltage, current, energy consumption and many more. You can also remotely control your technology using outputs.

SensDesk is easy to setup, just connect your HW group device to the network, create an account and start monitoring!

SensDesk is for end users as well as project installations with hundreds of devices. It can even also be installed on your own servers.

The setup is quick and easy and our sensors can provide data over Ethernet, WiFi, GPRS, LTE or Narrowband IoT.

WHY USE SENSESK.COM?



Remote monitoring

Temperature, humidity, power consumption, intrusion, water detection and many more...



Event alerts

Get alarms over SMS or e-mail and be sure you can respond to the event in time.



Reports and graphs

Generate automatic reports and access data history with just a click.



Remote output control

Use conditions to automatically respond to alarms or control outputs manually.



User friendly and reliable

Easy for home users, robust, customizable and scalable for business.

SOLUTIONS FOR YOUR BUSINESS



Data centers
& server rooms



Industry
& manufacturing



Warehouses
& storage rooms



Schools
& public buildings



Smart cities
& municipal



Logistics
& transportation



Hotels
& house rentals



Pharmacy
& medical



BTS stations
& technology



Stores
& retail



Alert services

You can set a safe range of values for any sens in the SensDesk. If this range is exceeded, the system shows an alert for the affected sensor. You can also set more safer ranges if you wish. Alerts can be forwarded to e-mail or SMS. All alerts, such as temporary device or sensor inaccessibility or values out of range, are recorded in the event log for easy system diagnostics.

Remote process control and switching

SensDesk can monitor and control virtual outputs of connected devices. User can switch any output manually; in addition, SensDesk provides several simple algorithms for switching the outputs automatically according to sensor states.



User dashboard, groups and locations

SensDesk provides tools for customizing the user interface. Users can define names of their sensors, devices and locations. You can also use group related monitoring and control. If you have 1 sensor or 1000, SensDesk always makes it easy for you to see alerts at a glance. All data are presented in charts, with visible operating/safe range limits. Recorded data can be downloaded from the portal in many formats, including XLS, CSV, PDF, JPG, SVG and more.

Quick setup and configuration

All HW group IoT devices have a built-in auto detection for the SensDesk portal. Connection of a new device to SensDesk takes less than 60 seconds! All sensors and devices can have custom names and arranged into groups and locations to provide a clear overview according to user preferences.

SensDesk is free

Free users can monitor any number of sensors, connected to up to 3 HW group devices. If you need to connect more devices, paid accounts are available.

You can also buy your own dedicated SensDesk and run it as a virtual image on your own server.




SensDesk solutions

The SensDesk portal is a universal and robust solution for many applications. You can get an account on www.sensdesk.com or you can buy the portal for yourself.

The SensDesk handles all the monitoring you need, but it can also remotely upgrade your devices, identify problems, perform mass operations and manage your entire IoT network. You can always rely on the data, and SensDesk will give you the best tools to analyze what you have measured. When there is a problem, you will always be alerted on time. You can also get periodical reports to make sure you are compliant with regulations.


Stores and retail

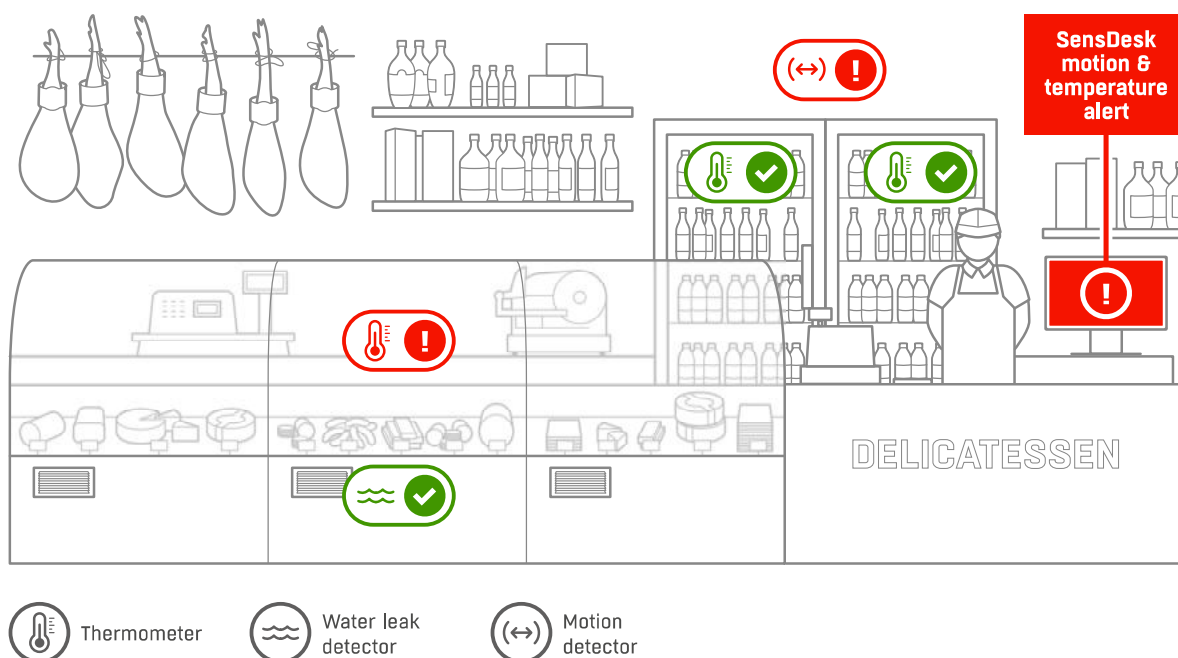

Storing food requires precise temperature monitoring, fast alarms and detailed reporting. SD devices with the SensDesk portal help you monitor your refrigerator temperature. The SD-WLD will detect water leaks under the refrigerator. Thanks to the SD-2xIn you receive alarms when unauthorized motion is detected in your store. All your data can be summarized in automated reports and emailed to you regularly.

- ✓ Temperature and humidity monitoring
- ✓ Water leaks and fire detection
- ✓ Motion detection
- ✓ Automatic reports
- ✓ Easy installation


Warehouses and storage rooms

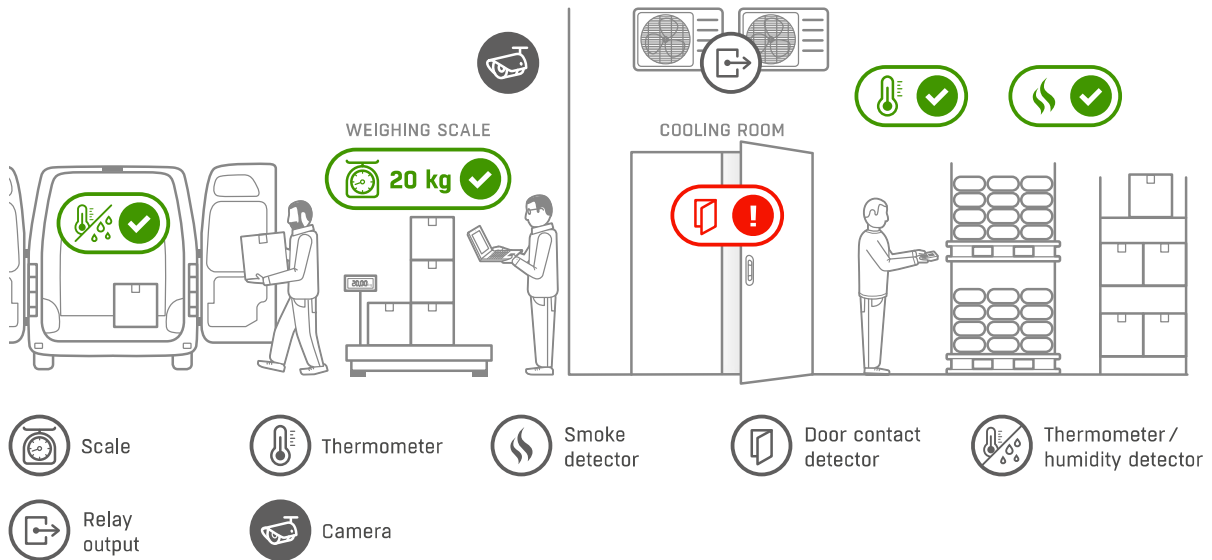

Warehouse operators need an efficient way to monitor temperature and humidity in their storage facilities and vehicles. You can also make sure your cargo is within the weight limit. In case of overheating, you can remotely control the air conditioner. Thanks to the SensDesk monitoring portal and HW group IoT devices, your storage facilities will now be safe and compliant to regulations.

- ✓ Temperature and humidity monitoring
- ✓ Water leaks and fire detection
- ✓ Intrusion detection
- ✓ Remote air condition control
- ✓ Easy deployment

Pharmacy and medical

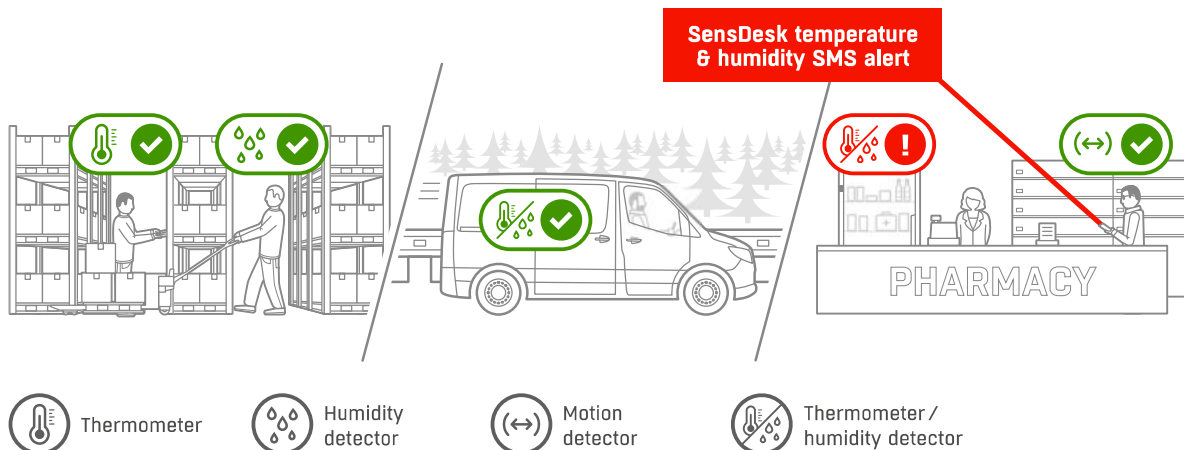

Pharmacies and medical companies are required to comply with many standards and regulations. With SensDesk you can simply set the safe values of temperature, humidity and other conditions. Then you can receive alarms whenever there is a problem and you can also create reports to confirm that you are complying with regulations.

- ✓ Temperature and humidity monitoring
- ✓ Precise flat sensors for fridges
- ✓ Wide temperature range down to -200 °C
- ✓ Easy installation and setup
- ✓ Scalable for multiple fridges and sites

Schools and public buildings



Vibration detector



Air quality detector



Smoke detector



Water leak detector



Motion detector





Thermometer

Schools and public need scalable and reliable monitoring, SensDesk helps you manage your IoT sensors' data even for large installations. You can control the temperature and air quality in the rooms remotely, data is also collected and analysed. The system can react to alarm values immediately. Fire and water leaks are serious hazards and our SensDesk IoT solution carefully monitors these values.

- ✓ Complex IoT monitoring
- ✓ Hundreds of measuring points
- ✓ Detailed analysis of data, reports
- ✓ Several layers of alarming
- ✓ Access control solution available



Hotels and house rentals

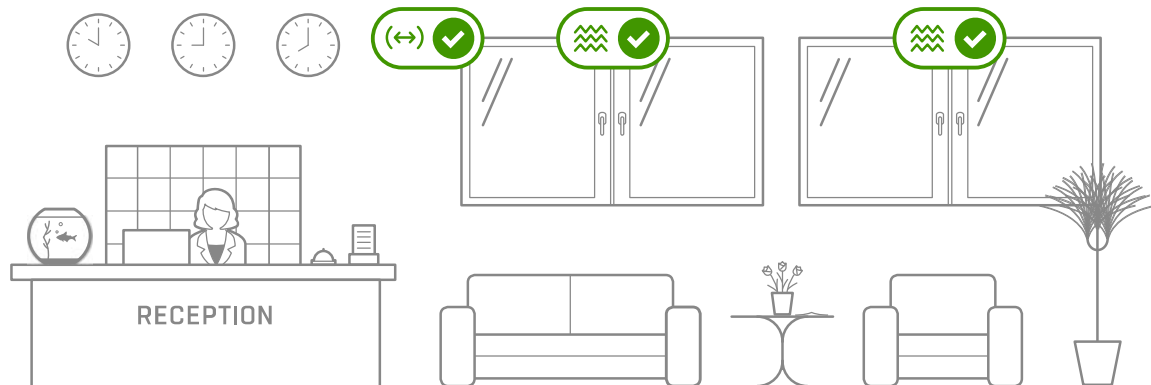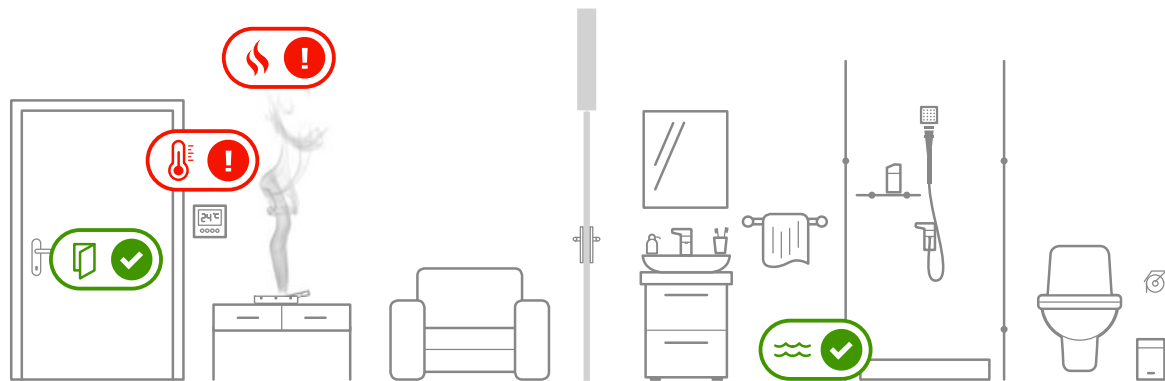

Vibration detector



Door contact detector



Smoke detector



Water leak detector



Motion detector




Thermometer

Water leaks or fires in hotels or house rentals can cause very costly damages. The SensDesk IoT portal helps you watch over all these risk factors. In case of an event it will immediately send out an alarm or react by shutting down water or activating a fire sprinkler. The SensDesk portal and HW group IoT devices have been successfully deployed in a number of solutions for many hotels and house rentals.

- ✓ Complex IoT monitoring
- ✓ Hundreds of measuring points
- ✓ Detailed analysis of data, reports
- ✓ Several layers of alarming
- ✓ Access control solution available


BTS stations and technology

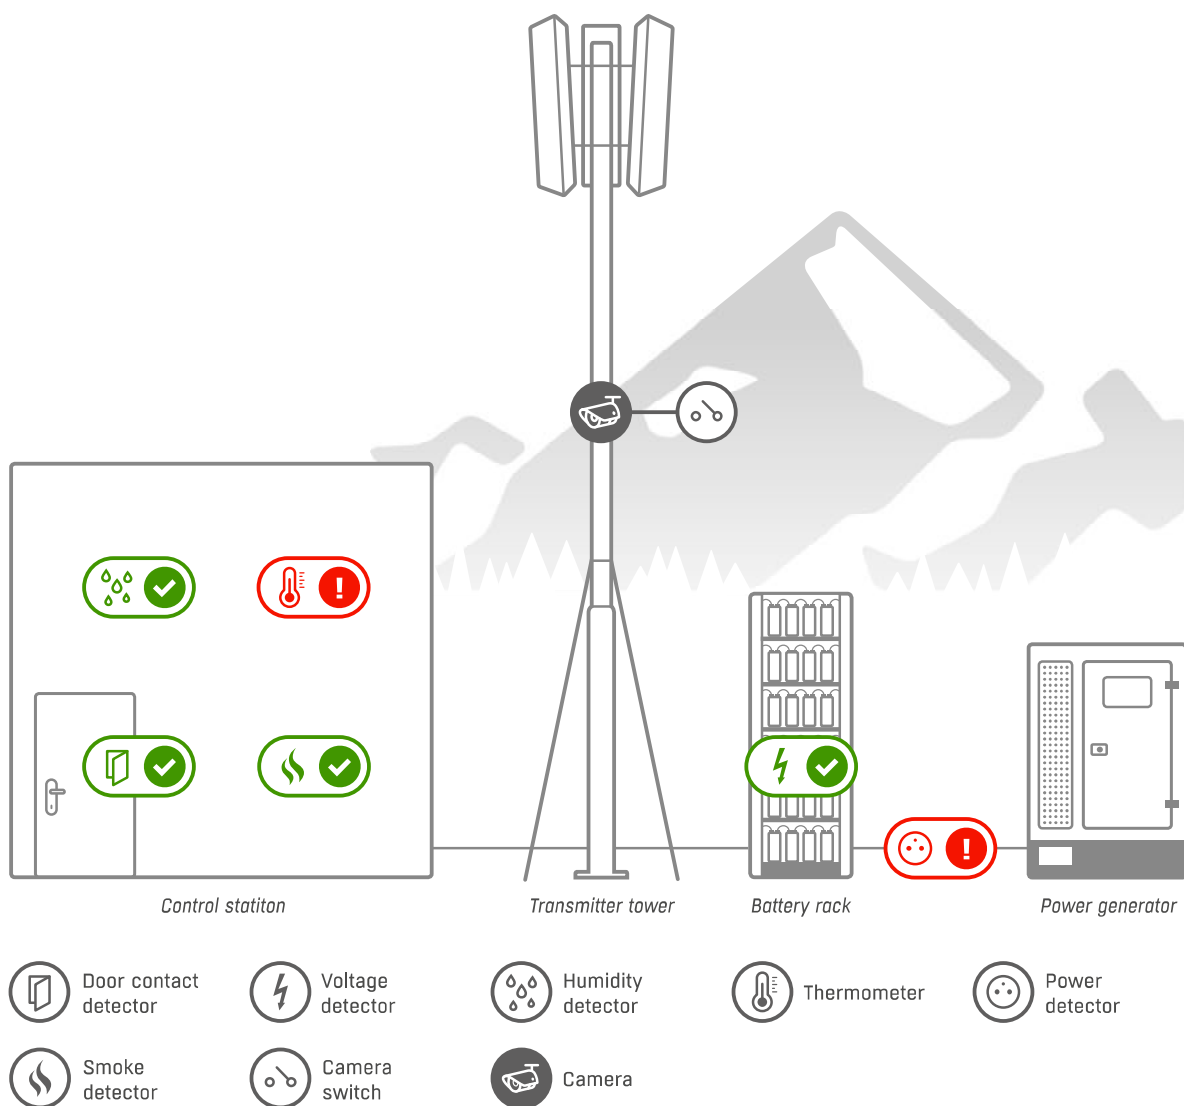

Remote technology needs reliable monitoring of cooling, heating, and site conditions. You may also need to monitor your proprietary technology using digital inputs and outputs. SensDesk and HW group IoT sensors can detect A/C failures, water leaks, movement, intrusion and more. SensDesk offers you different user and administration levels and tools for mass operations so it's robust and convenient even for large installations.

- ✓ Complex remote monitoring
- ✓ Hundreds of measuring points
- ✓ Detailed analysis of data, reports
- ✓ Several layers of alarming and users
- ✓ Output data to other systems

Smart cities & municipalities

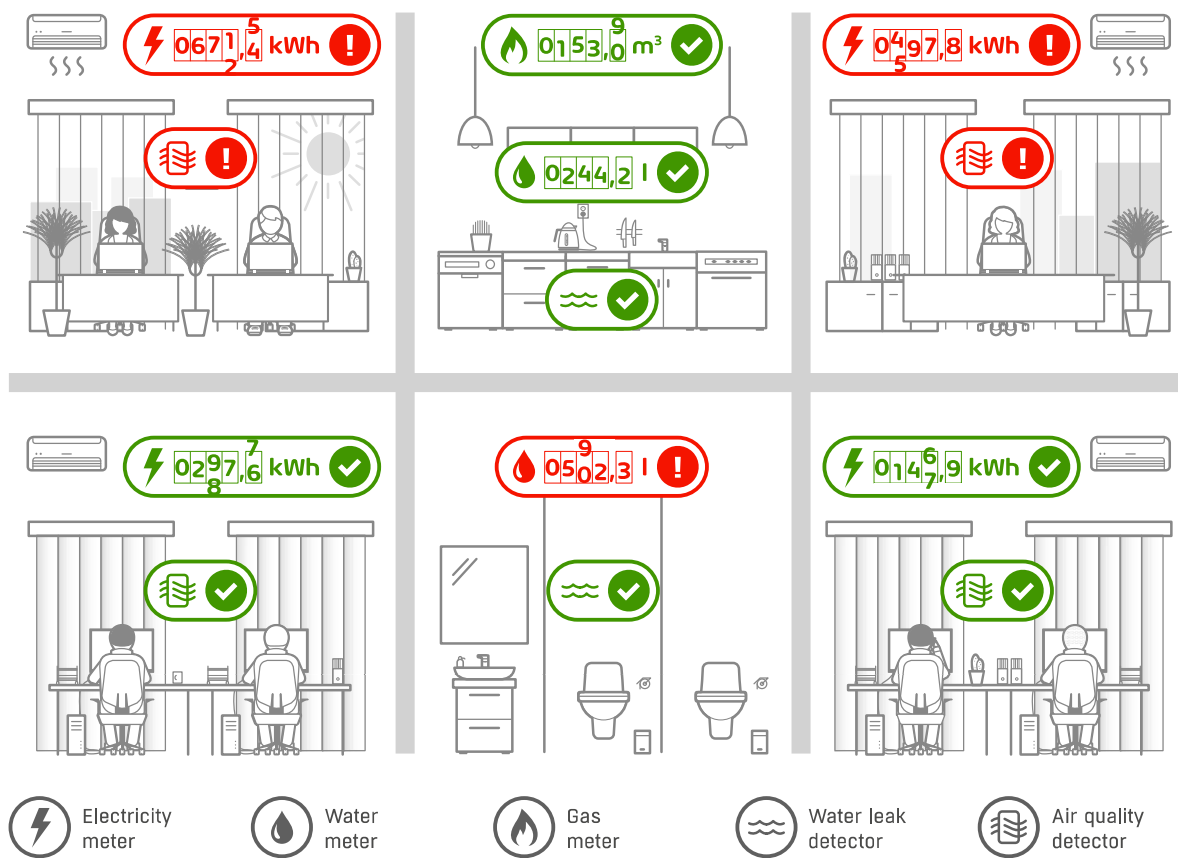


In smart cities and municipal facilities monitoring power consumption is important. These values are also affected by outdoor climatic conditions and weather. A common problem in these places is determining the optimal setting for air conditioner and CO2 concentration. Water leaks must also be monitored. The Sensdesk portal together with HW group IoT units let you develop the best solutions for your smart building's needs and have all the important values under control. Thanks to SensDesk's reports, graphs, and alarms you always know which values change and you can respond quickly to the developing situation. SensDesk portal helps the overall optimization of the building's operation and can provide you with huge cost savings.

- ✓ Complex IoT monitoring
- ✓ Hundreds of measuring points
- ✓ Detailed analysis of data, reports

Monitoring – SensDesk solutions


Data centers & server rooms

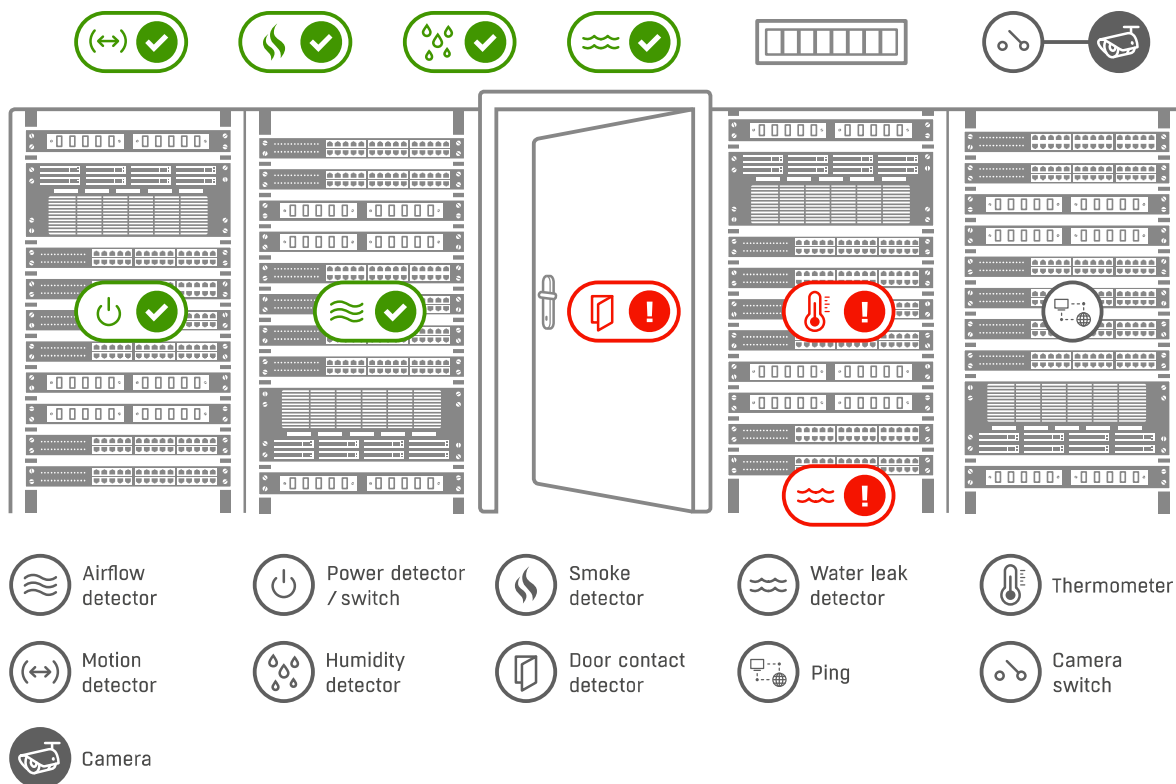

Data centers and server rooms are one of the most critical and vulnerable parts of every company. A simple overheating issue can degrade application performance for the end-users. Not to mention critical damage by heat, water leaks, and fire. We offer a simple and easy to install solution – HW group IoT devices and the SensDesk portal. SensDesk offers you different user and administration levels and tools for mass operations making it robust and convenient even for large installations. Thanks to SensDesk's reports, graphs, and alarms you always know where the problem is. Technicians can receive alarms in real-time, drill down to the exact issue and start troubleshooting before the end-user experiences any impact.

- ✓ Complex remote monitoring
- ✓ Detailed analysis of data, reports
- ✓ Several layers of alarming and users
- ✓ Temperature and humidity monitoring
- ✓ Water leaks and fire detection
- ✓ Motion detection
- ✓ Output data to other systems

Logistics & transportation

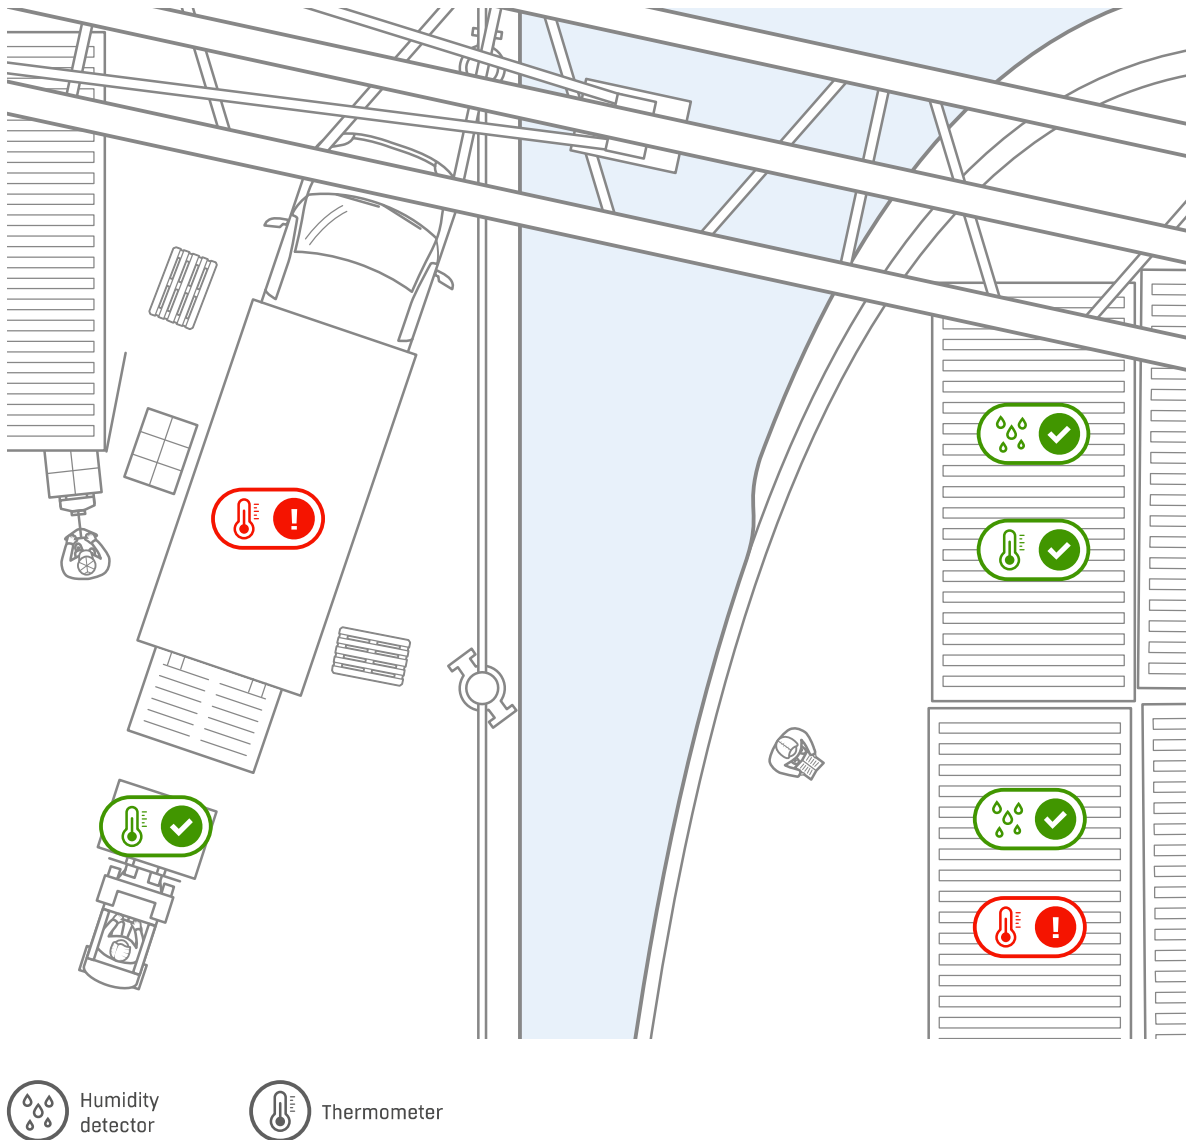

When transporting and storing sensitive goods it is very important to have all the right values under control and make sure the limits are not exceeded. Such places as container shipping yard need special supervision because there is a huge amount of goods which must be transported. If the current temperature in trucks or containers is not correct, there is a risk of significant damage. For critical shipment monitoring, we recommend the implementation of the SensDesk portal and HW group products. With alarms, graphs and timely reports, you can respond to unexpected influences promptly in order to have all shipments under control. Once a value approaches a set limit, you will automatically be alerted by email or SMS so that you can take countermeasures.

- ✓ Temperature and humidity monitoring
- ✓ Immediate alarming on several levels
- ✓ Automatic reports



```
elif _operation == "MIRROR_X":
    mirror_mod.use_x = False
    mirror_mod.use_y = True
    mirror_mod.use_z = False
elif _operation == "MIRROR_Z":
    mirror_mod.use_x = False
    mirror_mod.use_y = False
    mirror_mod.use_z = True

#selection at the end -add back the deselected mirror
mirror_ob.select= 1
modifier_ob.select=1
bpy.context.scene.objects.active = modifier_ob
print("Selected" + str(modifier_ob)) # modifier ob is the
    #mirror_ob.select = 0
    #name = bpy.context.selected_objects[0]
    #bpy.data.objects[mirror_ob.name].select = 1
```



Software

HW group units are not only dependent on the portal, you can get other software too or use your own.

Our devices are not only compatible with dozens of SNMP monitorings solutions, we can also provide you with our own HWg-Push protocol documentation and you can integrate our devices into your own portal.

HWg-PDMS



Windows application for collecting data from sensors and inputs over LAN and GSM. Export of data in the background.

Data processing and analysis with export to MS Excel. Data are collected by e-mail (e.g. from GSM/GPRS devices), LAN or Portal. Periodic or manual data export. Supported values: kWh, W, A, V, °C/°F, Cos Fi, Lx, %RH.

License type:

Freeware – max. 3 sensors


HWg-PDMS 8 – (up to 8 sensors)

HWg-PDMS 20 – (up to 20 sensors)

HWg-PDMS 200 – (up to 200 sensors)

HWg-PDMS unlimited

HWg-Trigger

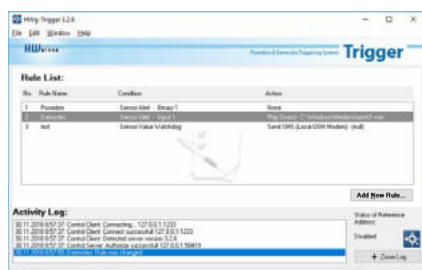

IFTT application for Windows. Values from HW group sensors can trigger different actions.

For example: Display a pop-up window, play a sound, start an application, start a service, shut down the PC. Device Watchdog function, sms alerts.

License type:

30-day trial version free of charge

Unrestricted commercial version

HWg-SDK




HWg-SDK is a package of programming examples and APIs for most of HW group products. Various programming languages, Unix, Windows and other programming platforms.

Supported programming languages: C++, Active X, VB, C#, .NET, Borland C++, Microsoft C++, Borland Delphi, JAVA, PHP, AJAX, and more.



Sensors and detectors

HW group offers hundreds of precise sensors and detectors for every application. Our units are also compatible with third party sensors. We do multiple levels of quality and precision testing on all our products to make sure you can rely on our data.

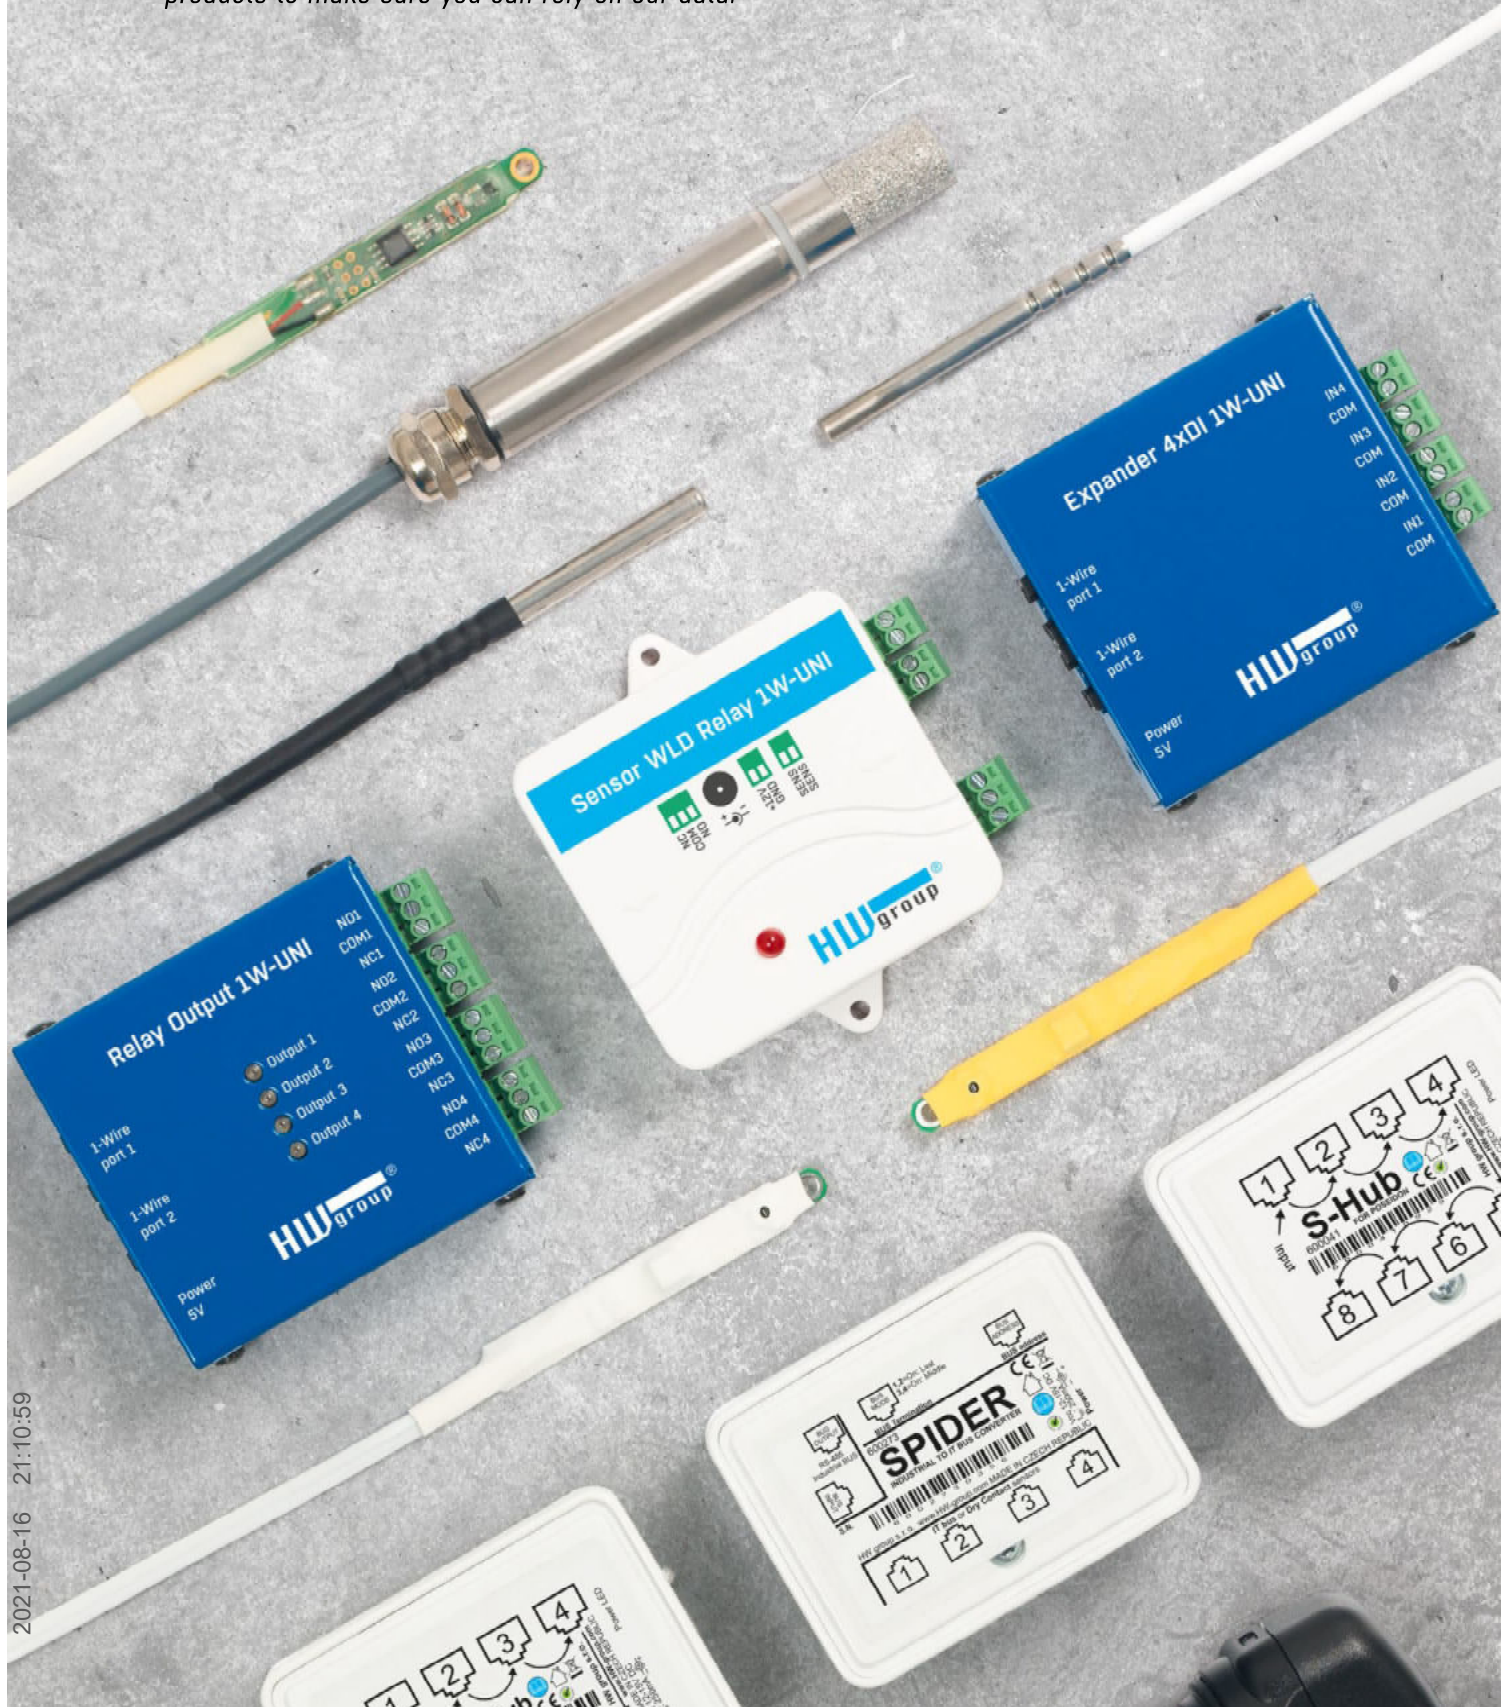

2021-08-16 21:10:59

New sensors

We have designed new sensors, these unique sensors to protect comfortable conditions in your working and living environments. Different combinations of values for every home, office or public installation.

1-Wire

Compatibility: Ares, HWg-STE, NB 2x1Wire, Poseidon2, SD 2x1-Wire, STE2



Temp HomeBox

Temperature range: -30 to +70 °C



HTemp HomeBox

Temperature range: -30 to +70 °C

Humidity range: 0 to 100% RH

1-Wire UNI

Compatibility: Ares, NB 2x1Wire, Poseidon2, SD 2x1-Wire, STE2 r2



Sensor CO₂ 1W-UNI

Temperature range: 0 to +50 °C

Humidity range: 0 to 95% RH

CO₂ range: 300 to 40000 ppm



Sensor THPVoc 1W-UNI

Temperature range: -30 to +70 °C

Humidity range: 0 to 100% RH

Atmospheric range: 30000 to 110000 Pa

Air quality range: 0 to 60000 ppb

Sensor name	Temperature	Relative humidity	Atmospheric pressure	VOC	CO ₂	Sensors values	Max. length of the 1-Wire bus
Temp HomeBox	✓	✗	✗	✗	✗	1	60 m
HTemp HomeBox	✓	✓	✗	✗	✗	2	60 m
Sensor CO ₂ 1W-UNI	✓	✓	✗	✗	✓	3	30 m
Sensor THPVoc 1W-UNI	✓	✓	✓	✓	✗	4	30 m



Monitoring – sensors and detectors

1-Wire UNI

Compatibility: Ares, NB-2x1Wire, Poseidon2, SD-2x1Wire, STE2 r2



Sensor 0-20 mA 1W-UNI
8-point calibration table,
accuracy: $\pm 2\%$



Sensor 4-20 mA 1W-UNI
8-point calibration table,
accuracy: $\pm 2\%$



Light 1Wire-UNI
Illuminance: 0-100 %
accuracy: $\pm 10\%$



Sensor WLD Relay 1W-UNI
Up to 85 meters of water detection
cable



Sensor 230 V AC 1W-UNI
Voltage range: 0-250 V AC
accuracy: 5 %



Sensor 60V 1W-UNI v2
Voltage range: 0-60 V DC
accuracy: 2 %



30A Current Probe 1W-UNI 2
Current range: 0-30 A DC
accuracy: 2 %



30A DC Current Probe 1W-UNI
Current range: 0-30 A DC
accuracy: 2 %



100A DC Current Probe 1W-UNI
Current range: 0-100 A DC
accuracy: 2 %



Temp-1W-UNI Pt100 Frost
Temperature range: -190 to 150 °C,
Converter 2xPt100 1W-UNI



Temp-1W-UNI Pt100 Cable
Temperature range: -50 to 200 °C,
Converter 2xPt100 1W-UNI



Converter 2xPt100 1W-UNI
Temperature range: -200 to 850 °C,
8-point calibration table



Monitoring – sensors and detectors



Expander 4xDI 1W-UNI
4× digital inputs on 3 m cable



Expander 4xDI 1W-UNI Industrial
4× digital inputs on 3 m cable



Flood detector 1W-UNI 3 m
1D water detection, can be fully submerged



Relay Output 1W-UNI
4× relay output, supported only by
HWg-Ares12/14 and Ares 12 LTE



Relay Output 1W-UNI Industrial
4× relay output, supported only by
HWg-Ares12/14 and Ares 12 LTE



1Wire Hub Power
8× 1-Wire or 1-Wire UNI bus expander



UPS 12 V and 5 V
Status info, capacity: 1,3 Ah



UPS 12 V
Status info, capacity: 1,3 Ah

M-Bus

Compatibility: HWg-PWR 3/12/25



M-Count 2C
2× pulse input (S0) / M-Bus output



Meter 1f DHZ 5/63-M-BUS
1× 230 V, 63 A



Meter 3f ED 310.DB HWG
3× 230 V/400 V, 63 A





Monitoring – sensors and detectors

1-Wire

Compatibility: Ares, HWg-STE, NB-2x1Wire, Poseidon2, SD-2x1Wire, STE2



HTemp-1Wire Outdoor 3m

Temperature range: -30 to 85 °C,
humidity range: 0-100 % RH



HTemp-1Wire 3m

Temperature range: -30 to 80 °C,
humidity range: 0-100 % RH



HTemp-1Wire-Box2

Temperature range: -10 to 80 °C,
humidity range: 0-100 % RH



Temp-1Wire Rack19

Temperature range: -10 °C to 80 °C.
2 RJ12 connectors



HTemp-1Wire Rack19

Temperature range: -10 to 80 °C,
humidity range: 0-100 % RH



Temp-1Wire IP67

Temperature range: -10 to 80 °C,
IP67 rating, available in 1m, 3m, 10m



Temp-1Wire-Flat 3m

Temperature range: -30 to 60 °C,
IP67 rating



Temp-1Wire 3m calibrated

Temperature range: -10 °C to 80 °C,
accuracy: 0.3 °C



Humid-1Wire

Humidity range: 0-100 % RH, accuracy:
5 % RH, available in 1m, 3m, 10m



1Wire Hub Power

8x 1-Wire or 1-Wire UNI bus expander



Temp 1Wire Pt1000

Temperature range: -50 to 200 °C,
IP67 rating



Temp 1Wire Pt1000 Frost

Temperature range: -200 to 160 °C,
IP67 rating



2021-08-16 21:10:59



Monitoring – sensors and detectors

RS-485

Compatibility: Poseidon2 4002

**HTemp-485 T3411**

Temperature range: -30 to 80 °C,
humidity range: 0-100% RH,
dew point range: -60 to 80 DP °C

**HTemp-485 T3419**

Temperature range: -30 to 105 °C,
humidity range: 0-100% RH,
dew point range: -60 to 80 DP °C

**HTemp-485 Box2**

Temperature range: -10 to 70 °C,
humidity range: 0-100% RH

**Temp-485-Pt100 Box2**

Temperature range: -30 to 70 °C,
IP65 rating

**Temp-485-Pt100 Cable3**

Temperature range: -10 to 70 °C,
IP23 rating

**Temp-485-Pt100 Frost2**

Temperature range: -190 to 150 °C,
IP53 rating

**Temp-485 Box2**

Temperature range: -10 to 70 °C,
IP23 rating

**Spider**

4× DI contacts or 4× 1-Wire to
RS-485 bus

**Poseidon S-Hub**

8× sensors over RJ45

Accessories

**Probe Pt100 TR125 2m**

Temperature range: -190 to 150 °C,
IP67 rating

**Probe Pt100 TG8 2m**

Temperature range: -50 to 200 °C,
IP67 rating



Digital Input

Compatibility: Ares, Damocles2, NB-2xIn, Poseidon2, SD-2xIn, STE2



Door Contact MK4
3 m connection wiring



Flood Detector LD-12
Spot flood detection



Sensor WLD Relay 1W-UNI
Up to 85 meters of water
detection cable



Power Detector
110/230 V voltage,
relay output (max. 50 V/130 V)



PowerEgg2
110/230 V single phase, max. load 8A



Gas Leak Detector
2 optional reactions



Vibration Detector SS14
IP23 rating



Motion PIR Detector
Recommended installation height: 2.5 m



Optical Smoke Detector FDR26
Covered space: 40 m², max. height 7 m



AirFlow Detector 5101
Wind speed: 1 to 10 m/s,
IP67 rating

Access

The SH4 is an ultimate access system that works with any electromagnetic lock and any RFID reader. It will work in your datacenter as well as in your office or even your home. Whether you have one door or several hundred racks, the SH4 system provides a cost effective way to manage access to your technology.

There are many locks and RFID readers on the market. The SH4 already supports the most common models and others can be added upon request. The SH4 features a relay output that can be programmed to mark a door open in a rack row or to trigger an alarm in case of a breach.


HWg-SH4



Any RS-232/Wiegand RFID reader and lock compatible



Main control unit for access control systems, compatible with any RS-232/Wiegand RFID reader and lock.

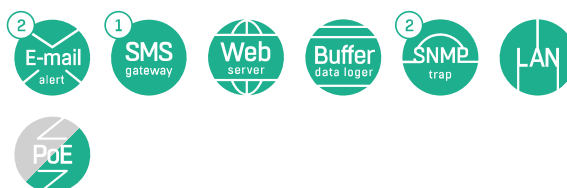

HWg-SH4 supports 2 independent locks (modules) and 2 RFID readers. The system can be extended over a LAN with up to 16 HWg-SH4e or HWg-SH4s units. HWg-SH4 can work online as well as offline. The HWg-DCD2 central database and control SW is included free of charge.

Protocols	HTTP, SNMPv1, SNMP traps, Modbus/TCP, XML, NetGSM
Software	HWg-DCD2, HWg-DCD2 mobile

HWg-SH4e



Expansion unit for the HW group access control system.

HWg-SH4e is an expansion to the HWg-SH4 main control unit. This unit controls 2 additional door locks. Requires a master SH4 control unit.

HWg-SH4s



Expansion unit for the HW group access control system.

HWg-SH4s is an expansion to the HWg-SH4 main control unit. This unit controls 1 additional door lock. Requires a master SH4 control unit.



Examples of 3rd party compatible equipment



Electronic locking swinghandle with reader

The H3-EM electronic locking swinghandle can easily accommodate a variety of rack sizes and configurations with its simple, single-hole panel preparation.

- HID SE® card reader that accepts 125 kHz Prox, HID 13.56 MHz iCLASS® and MIFARE® cards
- Efficient gear motor design for low power consumption
- Fits industry standard panel preps
- Integrated sensors for lock and latch status, monitoring and alarm functions
- Biometric fingerprint option



Electronic locking swinghandle

The H3-EM electronic locking swinghandle can easily accommodate a variety of rack sizes and configurations with its simple, single-hole panel preparation.

- Efficient gear motor design for low power consumption
- Fits industry standard panel preps
- Integrated sensors for lock and latch status, monitoring and alarm functions
- Biometric fingerprint option



RFID reader

- EM4100 (125 kHz) compatible RFID reader, with keypad
- Wiegand interface
- RJ45 jack for simple installation
- IP67



RFID reader

- 125 kHz and 13.56 MHz RFID reader
- Weather resistant
- Read UID of 125 kHz EM compatible and 13.56 MHz ISO 14443A MIFARE, DESFire®, Ultralight® and FeliCa format cards



Electronic rotary latch


- Lightweight, extended housing for added security and tamper resistance
- Accommodates existing control systems
- Integrated connector and snap-on manual override bracket simplify installation



Electronic slide bolts

- Works with a variety of door-mounted mechanical latches
- Electronic signal permits electronic monitoring, remote monitoring, audit trails, alarms

HWg-DCD2

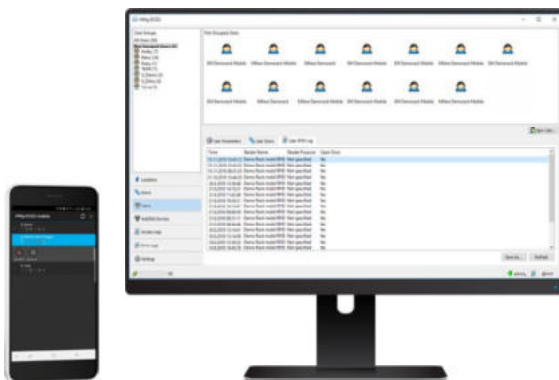


Free Windows application for access management and central database.

Allows doors to be opened remotely with a RFID chip, a SMS message, or on operator's command. Door management takes advantage of a central database with event logging, entry alerting, etc. Access permissions can be differentiated by users or sites and categorized into groups. In addition to data centers, the system is suitable for all premises where access to individual boxes, sections etc. must be controlled and authorized.

- License: the software is **FREE OF CHARGE**

Using the SH4 system for access control


The SH4 system can be used with any electromagnetic lock and any RFID reader. It is not only optimal for new projects but can also be retrofitted to existing installations. This page will show you how you can use and expand the system.

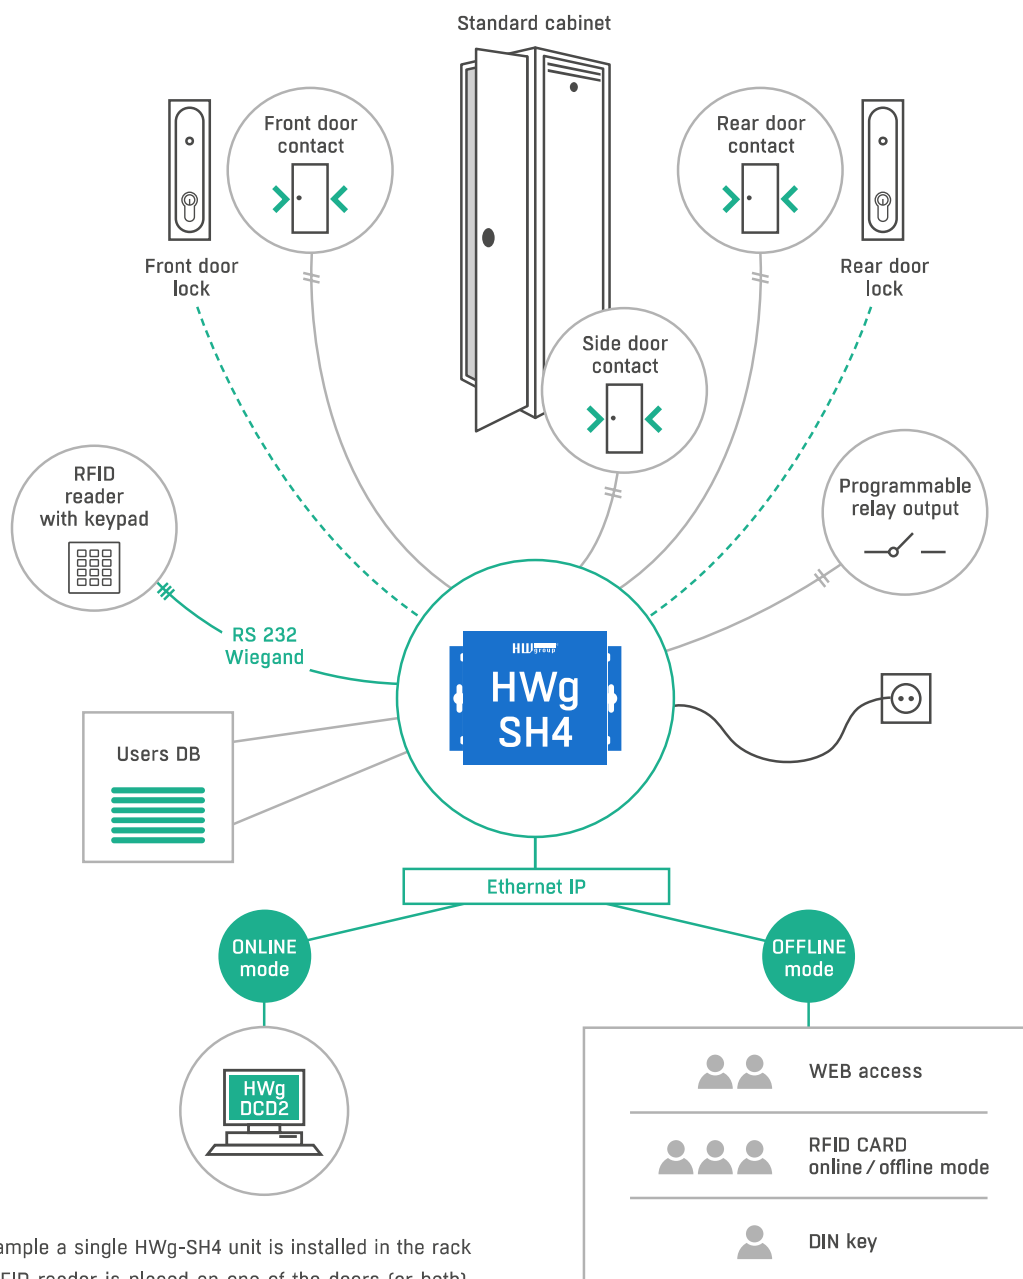

In this example a single HWg-SH4 unit is installed in the rack and the RFID reader is placed on one of the doors (or both). The device can be used in online or offline mode.

In **offline mode** the SH4 can work as a standalone device that holds an internal database of cards and users. You just need the Ethernet port to setup the unit and the device will follow the access rules without the need for LAN connection.

In **online mode** the device is connected with a server running the HWg-DCD software. This server manages all the access rules. The relevant part of the entire user database is loaded in each SH4 so that you can still access your technology even if your network connectivity fails.

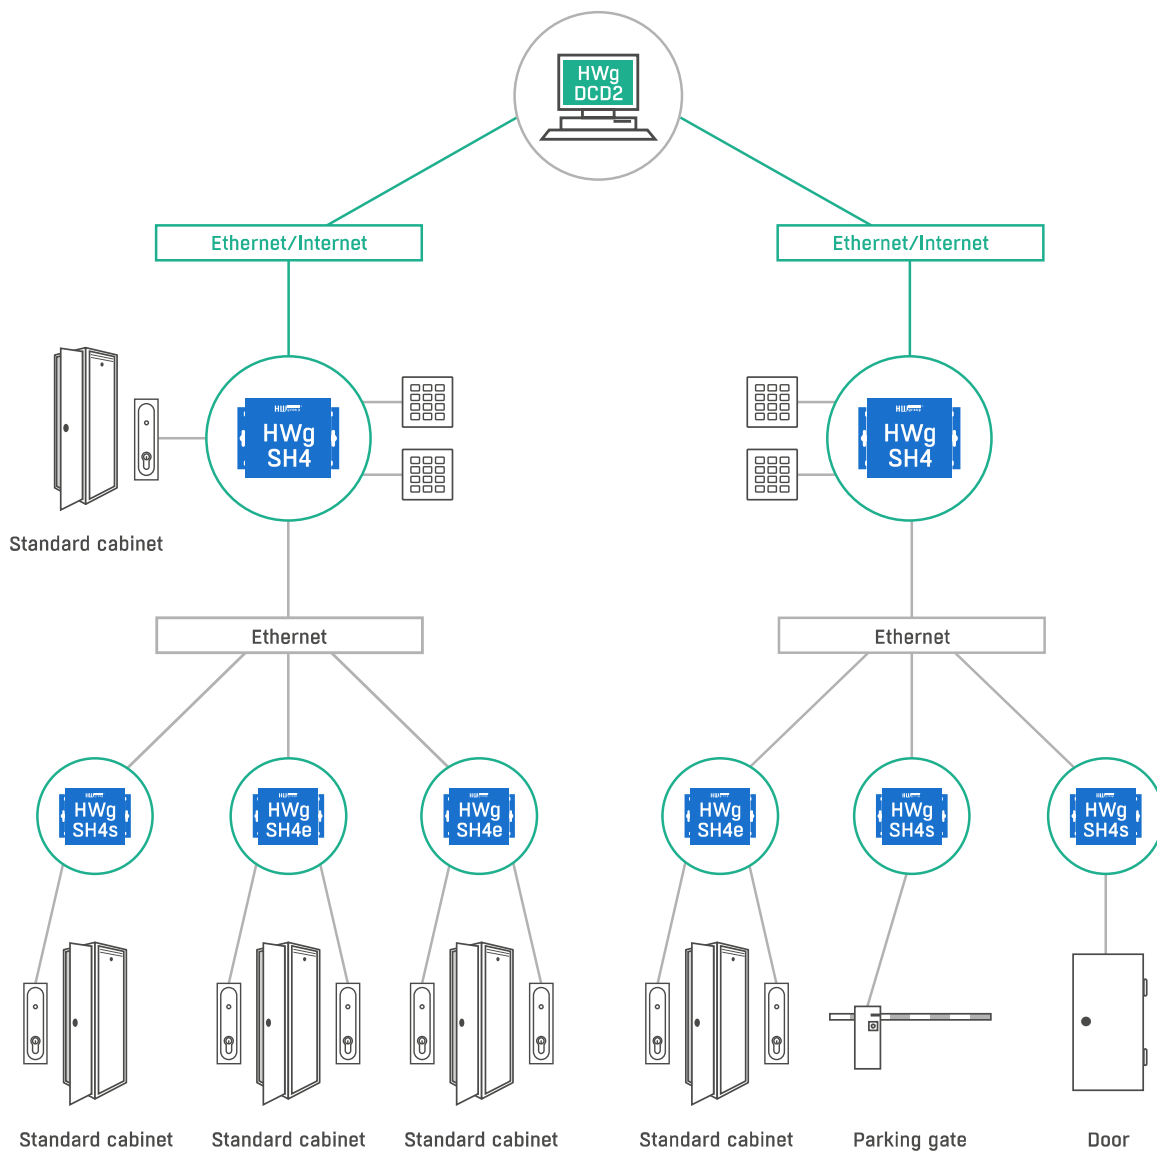

You can expand your system with the SH4e and SH4s units. These door unlockers are controlled from a supervising SH4 unit and its RFID keypad. They are connected over IP and can expand your system to unlock more points from a single RFID keypad. This significantly lowers the implementations costs. You can install a keypad RFID reader and use it to select the door, or you can setup the access rules so that each door with access right will open automatically. With keypad 2FA is also supported.

Features:

- Easy installation and management
- Scalable from one lock to hundreds
- Complex free management SW
- Online / offline mode
- SNMP for easy integration in your monitoring system
- SMS alarming in case of an unauthorized entry attempt

Benefits

- Security and unauthorized access prevention
- Complex log history with detailed information
- Provides information about visitor location
- Access rights can be granted and revoked instantly
- Early alarming to security management
- Evidence in case of a security issue

Usage

- Datacenters and racks
- Offices and residential buildings
- Technological rooms
- Commercial spaces
- Gates and parking lots
- Schools and public spaces



IP serial

IP Serial devices convert a full (9-pin) RS-232/485 serial port to Ethernet and vice versa. The serial port of the device can be connected to a PC over a LAN and accessed in Windows as a Virtual Serial Port (VSP). Digital inputs and outputs of the device can be controlled over the Web or using Modbus/TCP or NVT/Telnet. Two IP Serial devices can connect to each other (Box-2-Box mode) in order to tunnel serial communication and I/O, or up to 8 devices can be connected to transfer I/O signals.

- Typical applications include:
- Connecting RS-232 devices to a LAN – barcode / RFID scanners, serial printers, displays
 - Remote control of power supplies, gates, horns and other equipment over RS-232 and RS-485
 - Connecting buttons / switches to a SW application

PortStore5



PortStore5 is a RS-232 and RS-485 serial port to Ethernet converter with internal memory.

The RS-232 port of PortStore5 can be simultaneously used for data capture (CDR/SMDR, PBX call accounting) and for remote access (virtual serial port). With the freeware PS Eye application, data from the PortStore5 can be saved as txt files for further processing.

Serial port RS-232	1x full serial port (9 pin: Rx/D, Tx/D, GND, CTS, RTS, DSR, DTR, RI, CD)
Serial port RS-485	Max. 115.200 Bd

I/O Controller 2



I/O Controller2 converts a serial port, digital inputs and digital outputs to Ethernet.

Two units can connect to each other over a LAN (Box-2-Box mode); 8 digital inputs and 8 digital (open collector) outputs can be controlled over the Web or using Modbus/TCP. With the freeware HWVSP3 application, up to 100 remote serial ports can be connected to a single PC.

Serial port RS-232	1x full serial port (9 pin: Rx/D, Tx/D, GND, CTS, RTS, DSR, DTR, RI, CD)
Serial port RS-485	Max. 115.200 Bd



IP Relay HWg-ER02b



IP Relay HWg-ER02b connects a full RS-232/485 serial port as well as two digital (binary) inputs and two digital outputs to the Ethernet.

IP Relay HWg-ER02b connects a full RS-232/485 serial port as well as two digital (binary) inputs and two digital outputs to the Ethernet. The digital inputs and outputs can be controlled over the Web or via Modbus/TCP. IP Relay is fully certified to control 110/230V and fits on a DIN rail.

	Web interface	Digital input	Relay output	Modbus / TCP	Logger	NVT	Telnet
I/O Controller 2	✓	✓	✓	✓		✓	✓
PortStore5	✓			✓	✓	✓	✓
IP Relay HWg-ER02b	✓	✓	✓	✓		✓	✓

HW VSP3 Virtual serial port




HW VSP3 – Single

Software driver that adds a virtual serial port (e.g. COM5) to the operating system and redirects the data from this port via a TCP/IP network to another hardware interface, which is specified by its IP address and port. HW VSP3 supports NT services, Windows 8, Windows 10 and Windows Server 2016.

HW VSP3 – Multi

Supports up to 254 remote serial ports. Works with HW group products only.

Hercules

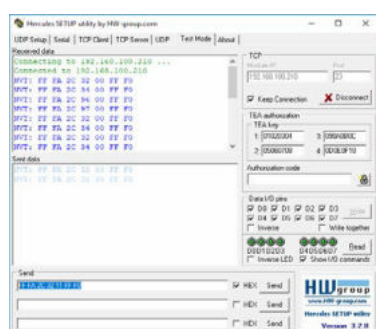

Debugging and testing tool for products with a serial port (PortBox, I/O Controller, IP Relay, PortStore).

Includes: UDP setup, Serial (RS-232 terminal), TCP client (telnet), TCP Server, UDP (UDP terminal) and Test (test mode with I/O functions support).

Protocols

HW group monitoring and control units have been designed from the beginning to use the Ethernet. The expanding Internet of Things (IoT) market needs devices that are able to communicate over multiple platforms used in public and private networks. Innovations in our units respond to this need.



RS-485

A bus for industrial environments. Sensors can be up to 1000m away. ASCII-based communication.



HTTPS

HTTPS is a secure (encrypted) version of the HTTP communication protocol that is used to display WWW pages.



SMTP

SMTP (Simple Mail Transfer Protocol) is used to transfer electronic mail (e-mail) messages.



GPRS

A service for connecting mobile devices to the Internet via the GSM mobile network.



TLS

TLS protocol provides for secure communication over the Internet (for WWW, e-mail and other types of data transfer).

1-Wire

Digital bus from the Dallas Semiconductors company. Each sensor has its own unique ID. 60m total length per each active RJ11 port.

IPv6

Successor of IPv4. The protocol extends the address field from 32 to 128 bits. Integrated security and mobility functions.

SNMP

Simple protocol for exchanging basic system information. Most well-known 3rd party SNMP SW: Nagios, PRTG, Cacti, CapTemp, Zabbix, SolarWinds.

netGSM

The netGSM function allows to share one GSM modem connected to one of the devices with other devices in the same network.

Modbus/TCP

is an extension of Modbus RTU protocol. Supported in 3rd party SCADA SW e.g. Wonderware-In Touch, Citect, Siemens-WinCC.

M-Bus

M-Bus is designed for data transfer in the area of measurements, HVAC control, as well as gas, water and electricity metering.

MQTT

MQTT is a simple way of transferring small volumes of data over a standard TCP/IP network.

SNTP

Protocol for synchronizing a device's internal clock with a time server over the Internet. Allows all devices in a network to use the same and accurate time.

HWg-Push

is a protocol for active communication from a device (IP sensor) to a central server. This protocol is used for Sensdesk.com.

XML

Used to exchange structured data with applications and as a format of configuration files. Available files are XML setup and XML values.



	Ethernet / web interface	PoE (Power over Ethernet)	Wi-Fi	GSM / LTE	NB-IoT	RJ11 sensors (1-Wire / 1-Wire UNI)	RS-485	M-Bus	WLD sensing cable (2D)	DI (Digital Input)	AI (Analog input 4-20 mA)	DO (Digital Output)	VDO (Virtual Digital Output)	Telco power -48 V	Data Logger in the device	PushLog 256 kB (offline log for SensDesk)	SensDesk (HWg-PUSH)	HTTP	HTTPS	E-mail alerts / reports notification	SMS + Call (Ring) notification	SNMP v1	SNMP v3	SNMP trap	XML API	Modbus / TCP	MQTT (IoT)	IPv6	
Poseidon2 4002	✓	✓				16	26			12		4	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Poseidon2 3468	✓	✓				8				4		2	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Poseidon2 3268	✓	✓				8				4		2	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Poseidon2 3266	✓	✓				8				4				✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Damocles2 2404	✓	✓								24		4	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Damocles2 1208	✓	✓								12		8	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
Damocles2 MINI	✓	✓								4		2	8	✓	✓	✓	✓	✓	✓	✓	5	5*	✓	✓	5	✓	✓	✓	✓
STE2 r2	✓	✓	✓			5				2						✓	✓	✓	✓	✓	2	2*	✓			✓			
Ares 12 GMS / LTE				✓		14				2					✓	✓	✓	✓			5	5				✓			
Ares 10 GMS / LTE				✓		6				2					✓	✓	✓	✓			5	5				✓			
WLD2	✓	✓	✓						4				4			✓	✓	✓	✓	✓	4	4	✓		4	✓			
HWg-PWR25	✓						25			8					✓		✓	✓	✓		3	1*	✓		1	✓	✓		
IP WatchDog2 Industrial	✓	✓										2	8		✓		✓	✓	✓	✓	2	1*	✓		1	✓			
IP WatchDog2 Lite	✓	✓										2	8		✓		✓	✓	✓	✓	2	1*	✓		1	✓			
SMS-GW3 GSM / LTE	✓	✓		✓													✓	✓	✓				✓			✓			

+ 3rd party portals

SD-2x1Wire	✓	✓	✓			4									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
SD-WLD	✓	✓	✓						1						✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
SD-2xIn	✓	✓	✓							2					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
SD-2xOut	✓	✓	✓									2			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
SD-4-20mA	✓	✓	✓								1				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
NB-2x1Wire					✓	4									✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
NB-WLD					✓						1				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
NB-2xIn					✓						2				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
NB-2xOut					✓							2			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

✓ - available

✓ - available on request

✓ - available through SensDesk.com and 3rd party portals

* - to send Alert SMS & Calls you will need HWg-SMS-GW3 (LTE) device on LAN or connect the device to the SensDesk.com service via Internet.